




MONITORED Rack PDU Specification

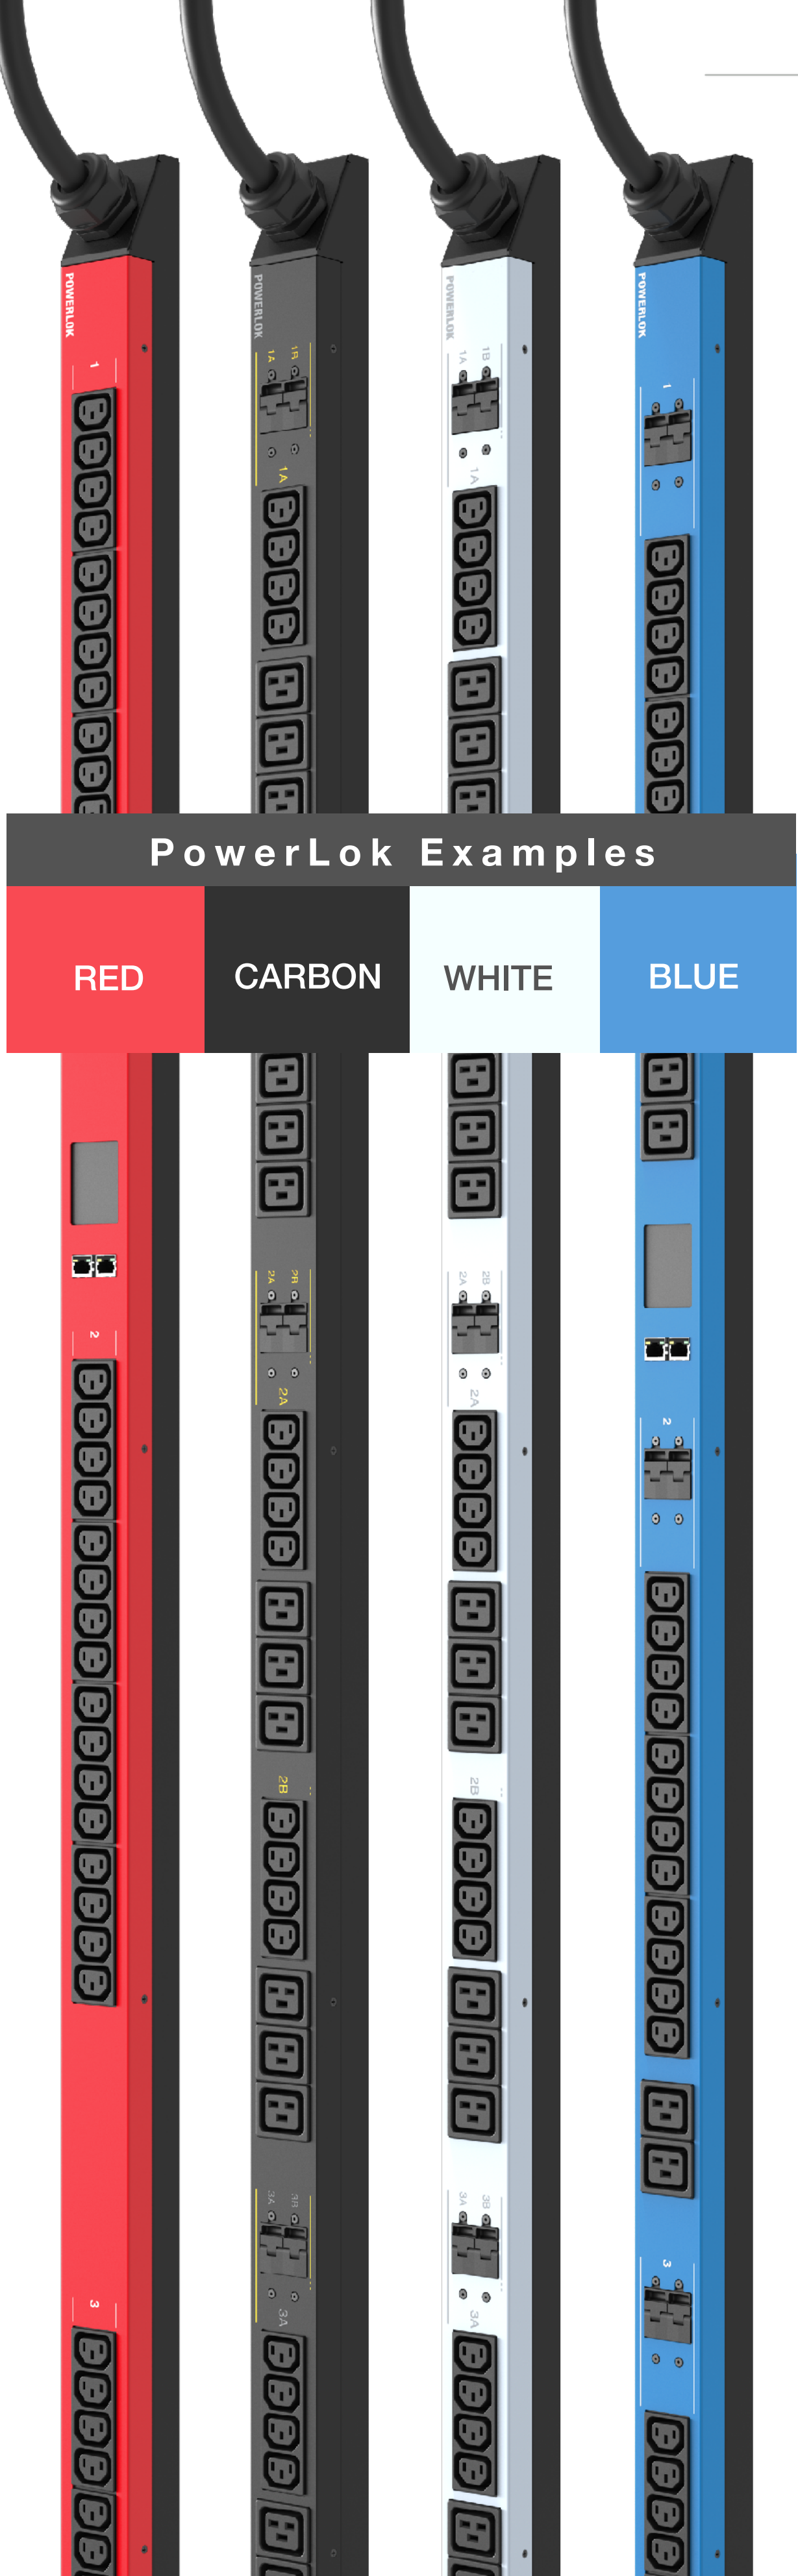


CUSTOMER SIGNATURE

DATE APPROVED

Customer agrees to this specific PowerLok configuration

PowerLok Configuration Model: PL7102 RACK PDU, BASIC, 72", 20A 120/208V 3PH (5.7 kW), 36-C13 & 6-C19, 10FT WHIP, NEMA L21-20P, CARBON	
POWER	20A 120/208V 3PH 5.7 kW
UNIT LENGTH	72 IN
PLUG TYPE	NEMA L21-20P
WHIP LENGTH	10 FT
RECEPTACLES	36-C13 & 6-C19
CORDLOK	NONE
MONITORING	NONE
120V TECH POWER	NONE
COLOR	CARBON

PowerLok Universal Specification Quote: Customer: Order No.: Order Qty:	
Over Current Protection	20A magnetic breakers on 30A models.
Power Whip	20A: 12AWG 3 or 5 wire & 30A: 10AWG 3 or 5 wire.
Operating Temperature	Full nameplate continuous operation: 0-50C (32-122F)
Heavy Steel - Powder Coat Color	See PowerLok Configuration Table for Color
Rack PDU Type	Vertical Rack-mount
Toolless Mounting: Center Spacing	61.25in (12.25 spacing standard). 59.05 mounting option available on Rack PDU.
Assembled in the USA	Yes - with local and off-shore sourced components
Product Warranty	3-year from date of shipment, repair or replace.
Certification/Agency Approvals	TUV Certified to UL/CSA 60950-1 with NOM Addendum for Mexico, FCC Part 15 Class A Conformance, RoHS Compliant
Operating Environment	0-50C (32-122F), 5-95% Relative Humidity, 0-10,000ft (0-3000 meters) Elevation.
Storage Environment	-25-65C (32-122F), 5-95% Relative Humidity, 0-10,000ft (0-3000 meters) Elevation.
Chassis Dimensions (LxWxD)	72"L x 2.18"W x 2.0"D
Package Dimensions (LxWxD)	84.0"L x 22.0"W x 5.0"D (4-Pack) 84.0"L x 11.0"W x 5.0"D (2-Pack) 84.0"L x 7.0"W x 5.0"D (1-Pack)
Rack PDU Weight	15.0 lbs. (Actual weight varies slightly based on configuration)
Packaged Weight	17.0 lbs (1 unit - actual weight varies slightly based on configuration)

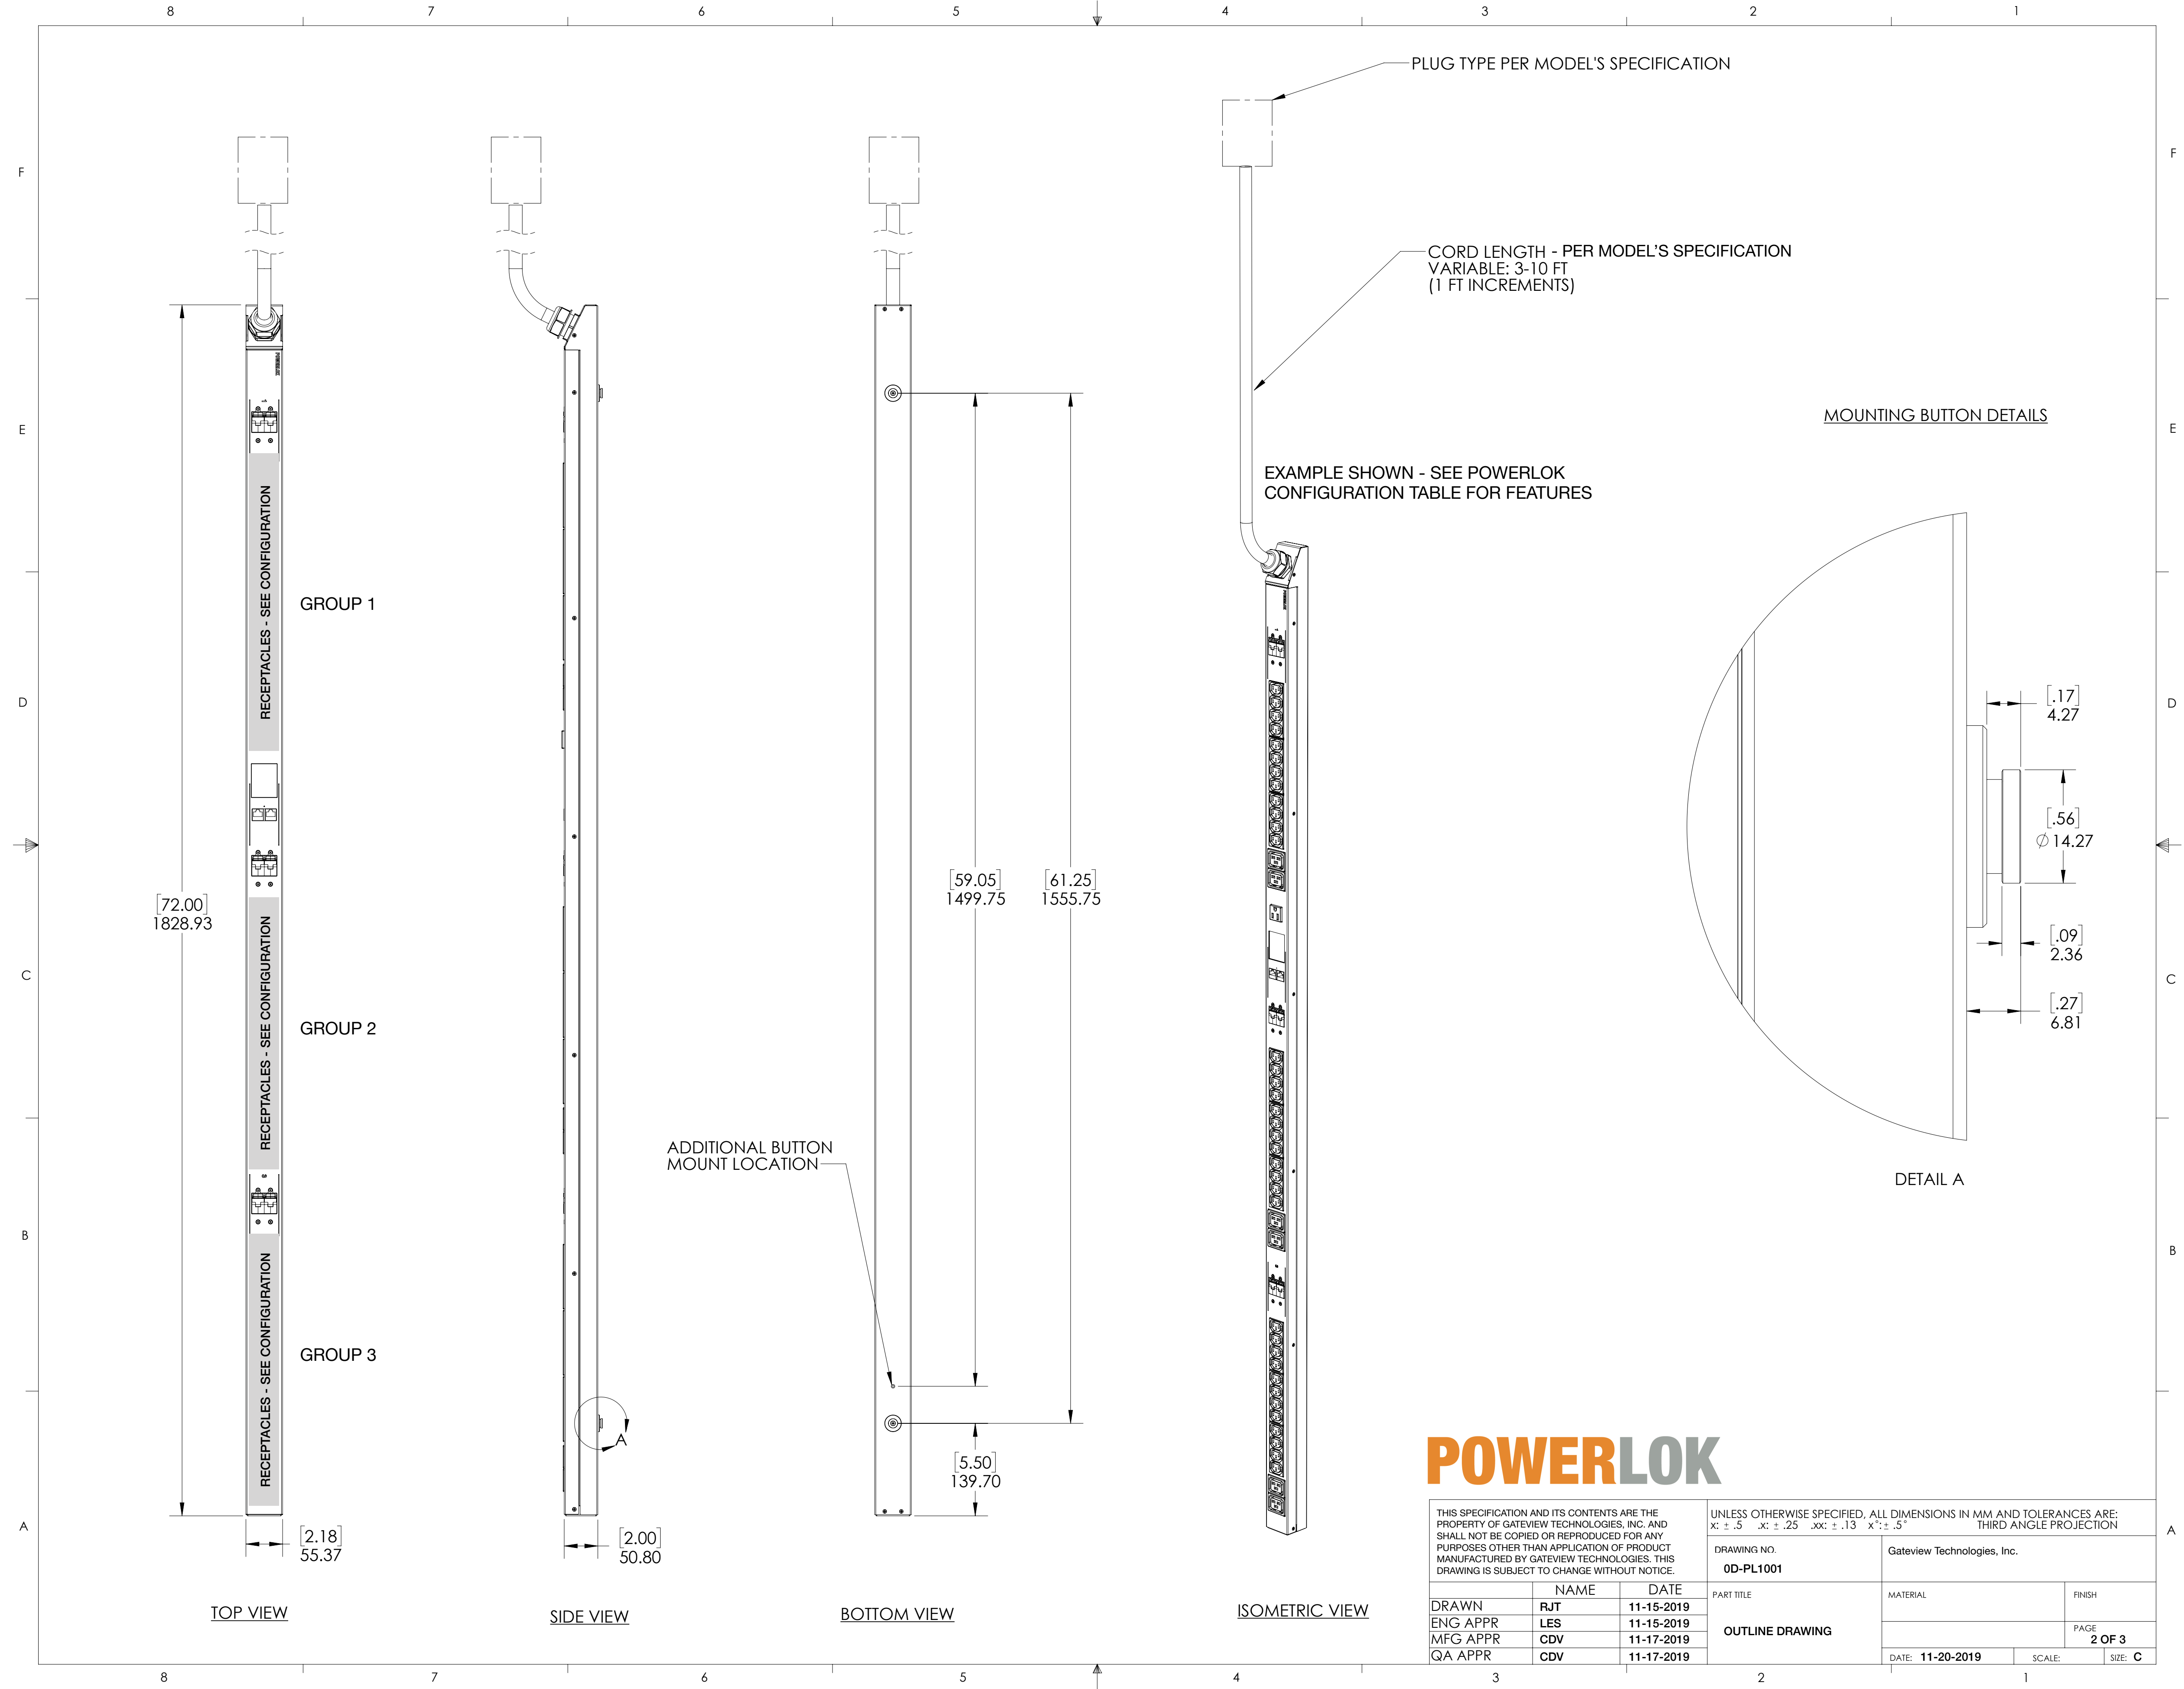

PLUG TYPE PER MODEL'S SPECIFICATION

CORD LENGTH - PER MODEL'S SPECIFICATION
VARIABLE: 3-10 FT
(1 FT INCREMENTS)


EXAMPLE SHOWN - SEE POWERLOK
CONFIGURATION TABLE FOR FEATURES

MOUNTING BUTTON DETAILS

DETAIL A

POWERLOK

THIS SPECIFICATION AND ITS CONTENTS ARE THE PROPERTY OF GATEVIEW TECHNOLOGIES, INC. AND SHALL NOT BE COPIED OR REPRODUCED FOR ANY PURPOSES OTHER THAN APPLICATION OF PRODUCT MANUFACTURED BY GATEVIEW TECHNOLOGIES. THIS DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE.			UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS IN MM AND TOLERANCES ARE: X: ± .5 .X: ± .25 .XX: ± .13 X": ± .5" THIRD ANGLE PROJECTION		
DRAWING NO.		Gateview Technologies, Inc.			
0D-PL1001					
PART TITLE		MATERIAL		FINISH	
OUTLINE DRAWING				PAGE	
				2 OF 3	
DATE: 11-20-2019		SCALE:		SIZE: C	
DRAWN		NAME		DATE	
ENG APPR		RJT		11-15-2019	
MFG APPR		LES		11-15-2019	
QA APPR		CDV		11-17-2019	

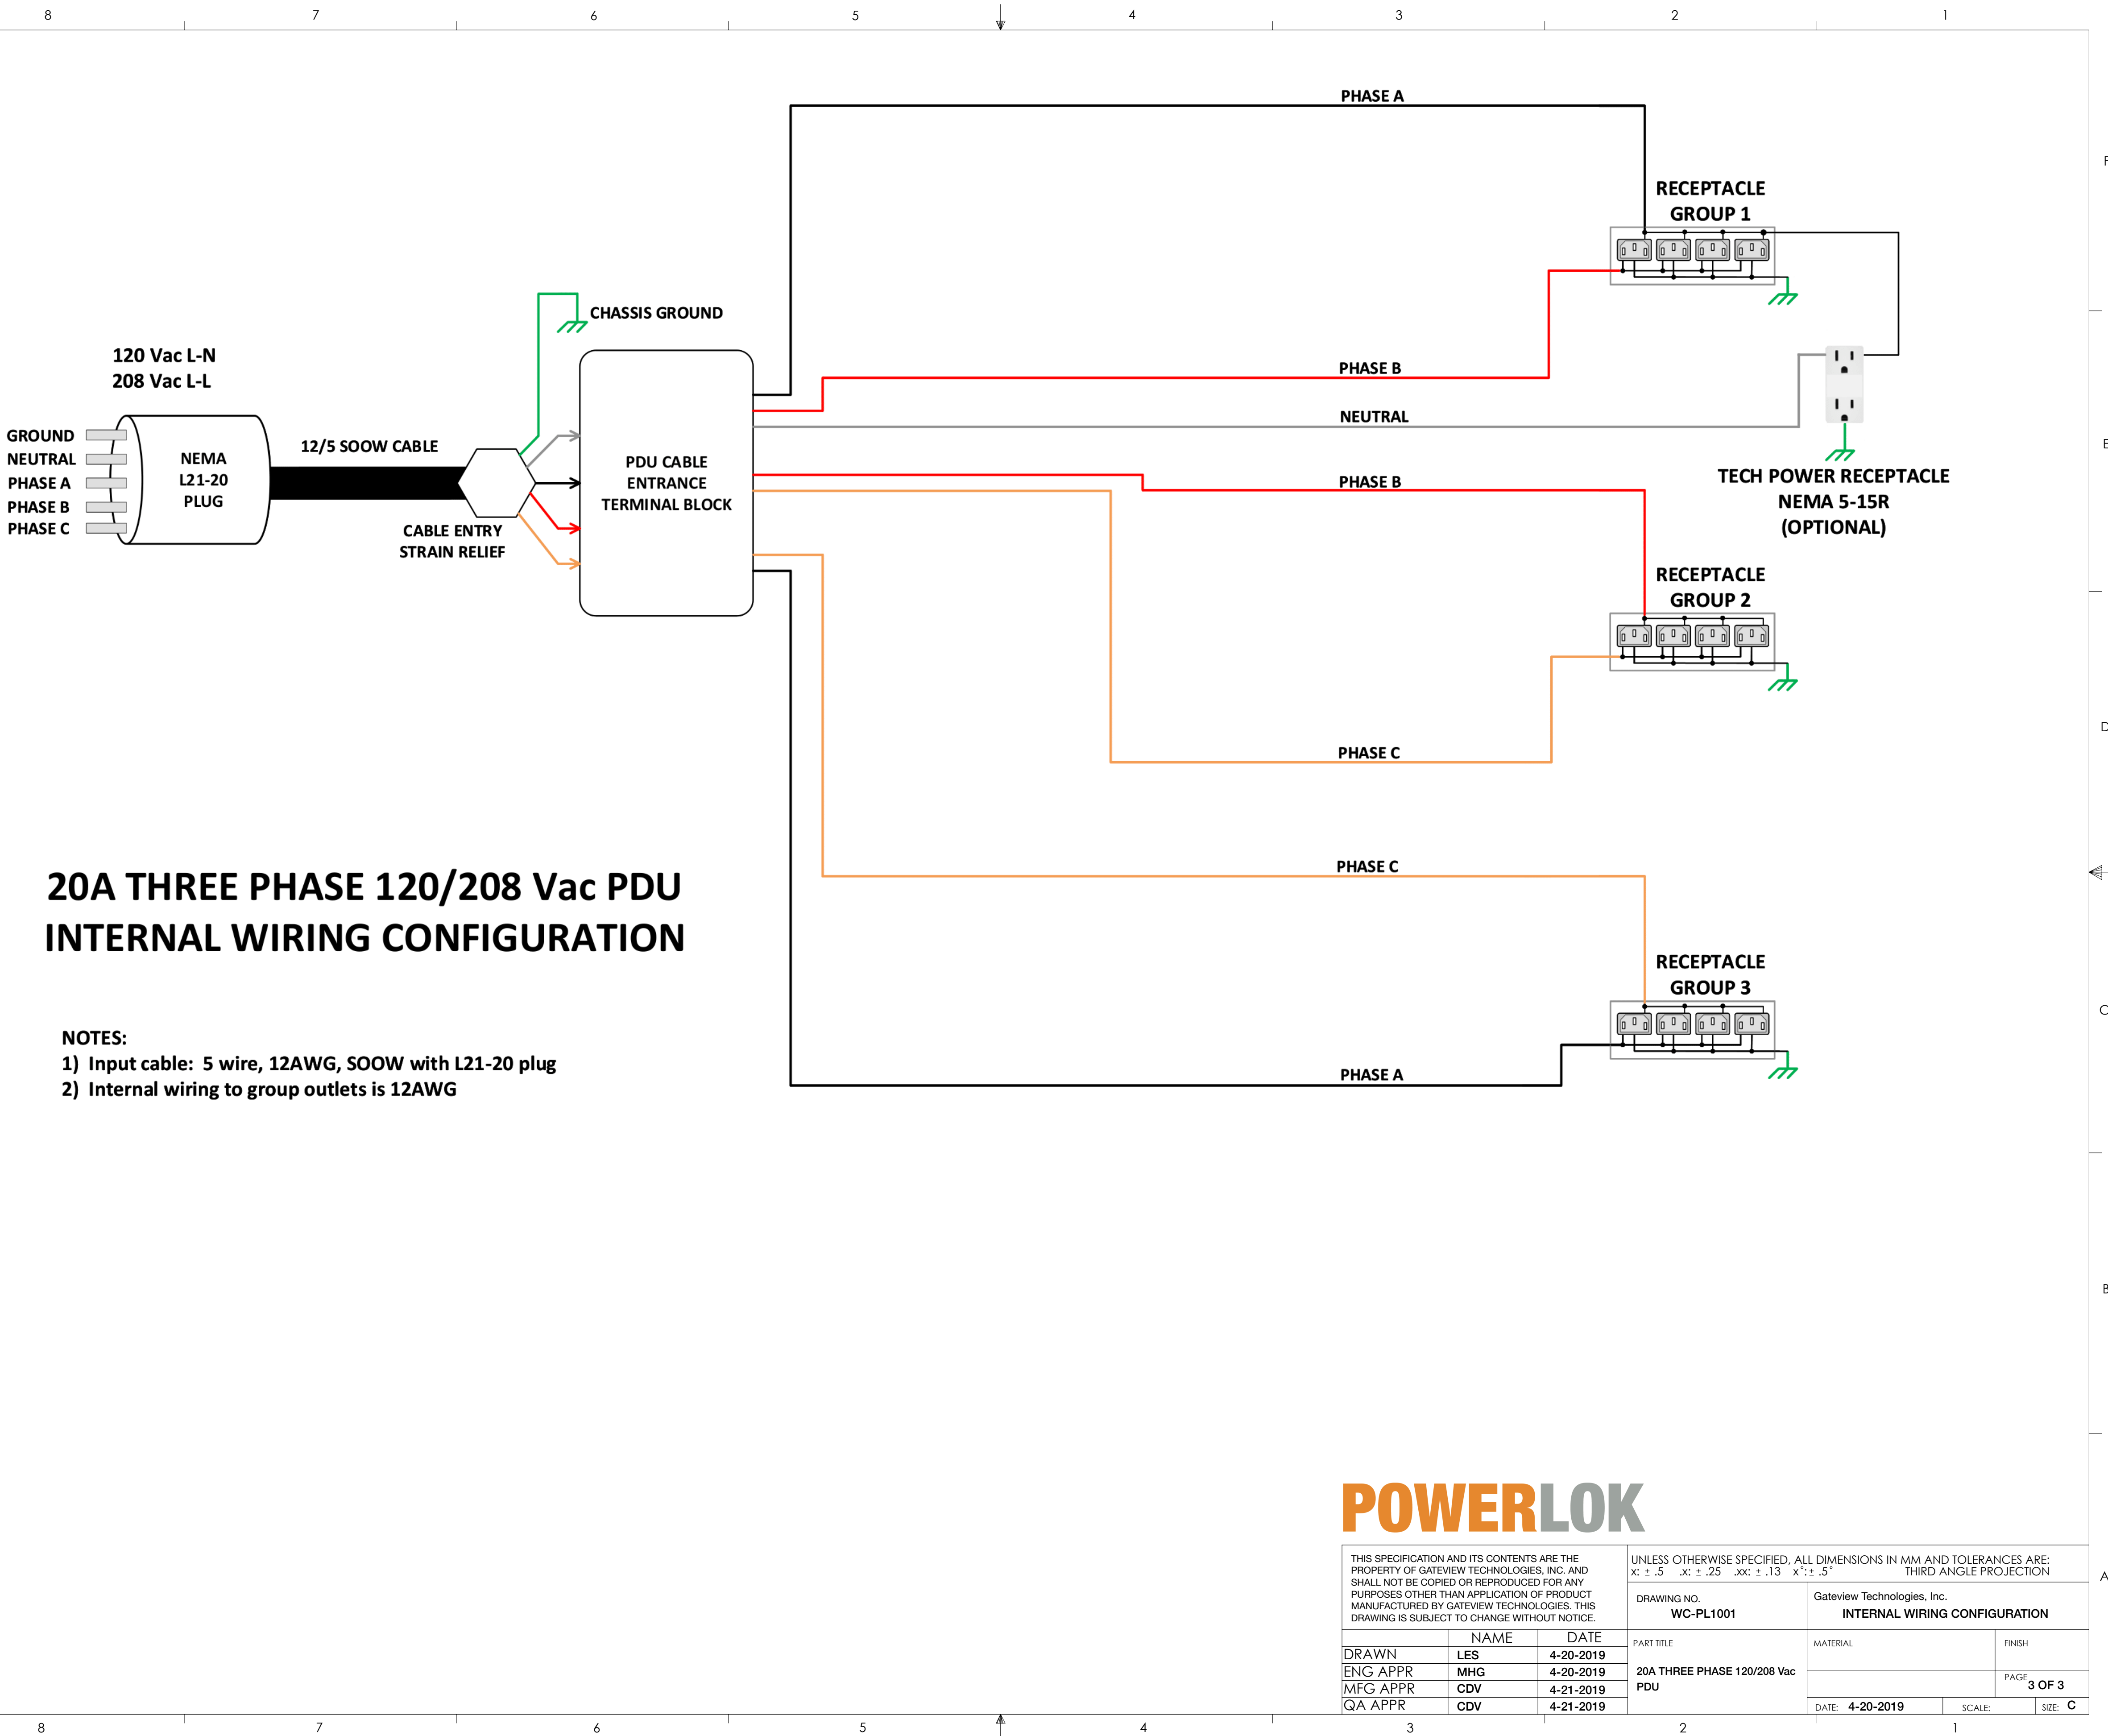

20A THREE PHASE 120/208 Vac PDU INTERNAL WIRING CONFIGURATION

- NOTES:**
- 1) Input cable: 5 wire, 12AWG, SOOW with L21-20 plug
 - 2) Internal wiring to group outlets is 12AWG

POWERLOK

THIS SPECIFICATION AND ITS CONTENTS ARE THE PROPERTY OF GATEVIEW TECHNOLOGIES, INC. AND SHALL NOT BE COPIED OR REPRODUCED FOR ANY PURPOSES OTHER THAN APPLICATION OF PRODUCT MANUFACTURED BY GATEVIEW TECHNOLOGIES. THIS DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE.			UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS IN MM AND TOLERANCES ARE: X": ± .5 .X": ± .25 .XX": ± .13 X'": ± .5		
			DRAWING NO. WC-PL1001	Gateview Technologies, Inc. INTERNAL WIRING CONFIGURATION	
DRAWN	NAME LES	DATE 4-20-2019	PART TITLE 20A THREE PHASE 120/208 Vac PDU	MATERIAL	FINISH
ENG APPR	MHG	4-20-2019		PAGE 3 OF 3	
MFG APPR	CDV	4-21-2019			
QA APPR	CDV	4-21-2019			
			DATE: 4-20-2019	SCALE:	SIZE: C