




MONITORED Rack PDU Specification

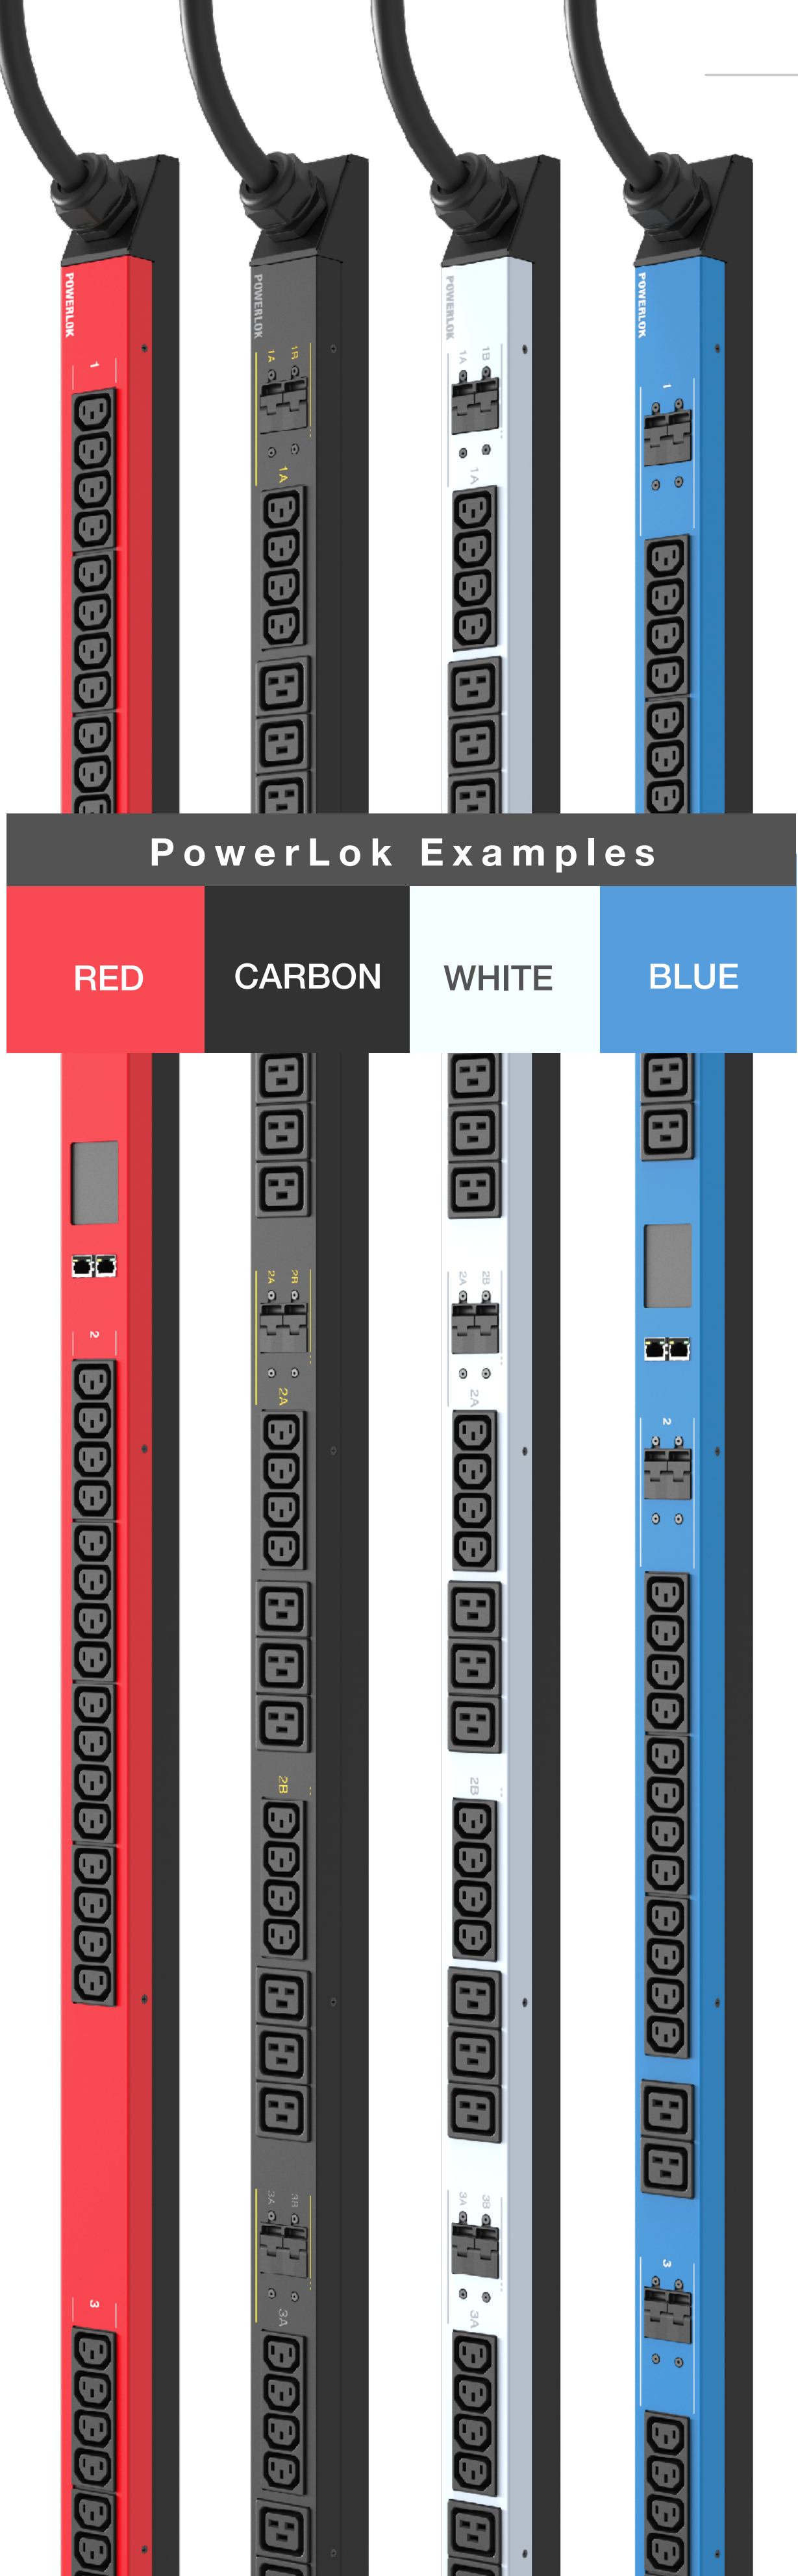


CUSTOMER SIGNATURE

DATE APPROVED

Customer agrees to this specific PowerLok configuration


PowerLok Configuration Model: PL7203 RACK PDU, BASIC, 72", 30A 120/208V 3PH (8.6 kW), 36-C13 & 6-C19, (1)5-15R, 10FT WHIP, NEMA L21-30P, CARBON	
POWER	30A 120/208V 3PH 8.6 kW
UNIT LENGTH	72 IN
PLUG TYPE	NEMA L21-30P
WHIP LENGTH	10 FT
RECEPTACLES	36-C13 & 6-C19
CORDLOK	NONE
MONITORING	NONE
120V TECH POWER	(1)5-15R
COLOR	CARBON

PowerLok Universal Specification Quote: Customer: Order No.: Order Qty:	
Over Current Protection	20A magnetic breakers on 30A models.
Power Whip	20A: 12AWG 3 or 5 wire & 30A: 10AWG 3 or 5 wire.
Operating Temperature	Full nameplate continuous operation: 0-50C (32-122F)
Heavy Steel - Powder Coat Color	See PowerLok Configuration Table for Color
Rack PDU Type	Vertical Rack-mount
Toolless Mounting: Center Spacing	61.25in (12.25 spacing standard). 59.05 mounting option available on Rack PDU.
Assembled in the USA	Yes - with local and off-shore sourced components
Product Warranty	3-year from date of shipment, repair or replace.
Certification/Agency Approvals	TUV Certified to UL/CSA 60950-1 with NOM Addendum for Mexico, FCC Part 15 Class A Conformance, RoHS Compliant
Operating Environment	0-50C (32-122F), 5-95% Relative Humidity, 0-10,000ft (0-3000 meters) Elevation.
Storage Environment	-25-65C (32-122F), 5-95% Relative Humidity, 0-10,000ft (0-3000 meters) Elevation.
Chassis Dimensions (LxWxD)	72"L x 2.18"W x 2.0"D
Package Dimensions (LxWxD)	84.0"L x 22.0"W x 5.0"D (4-Pack) 84.0"L x 11.0"W x 5.0"D (2-Pack) 84.0"L x 7.0"W x 5.0"D (1-Pack)
Rack PDU Weight	15.0 lbs. (Actual weight varies slightly based on configuration)
Packaged Weight	17.0 lbs (1 unit - actual weight varies slightly based on configuration)

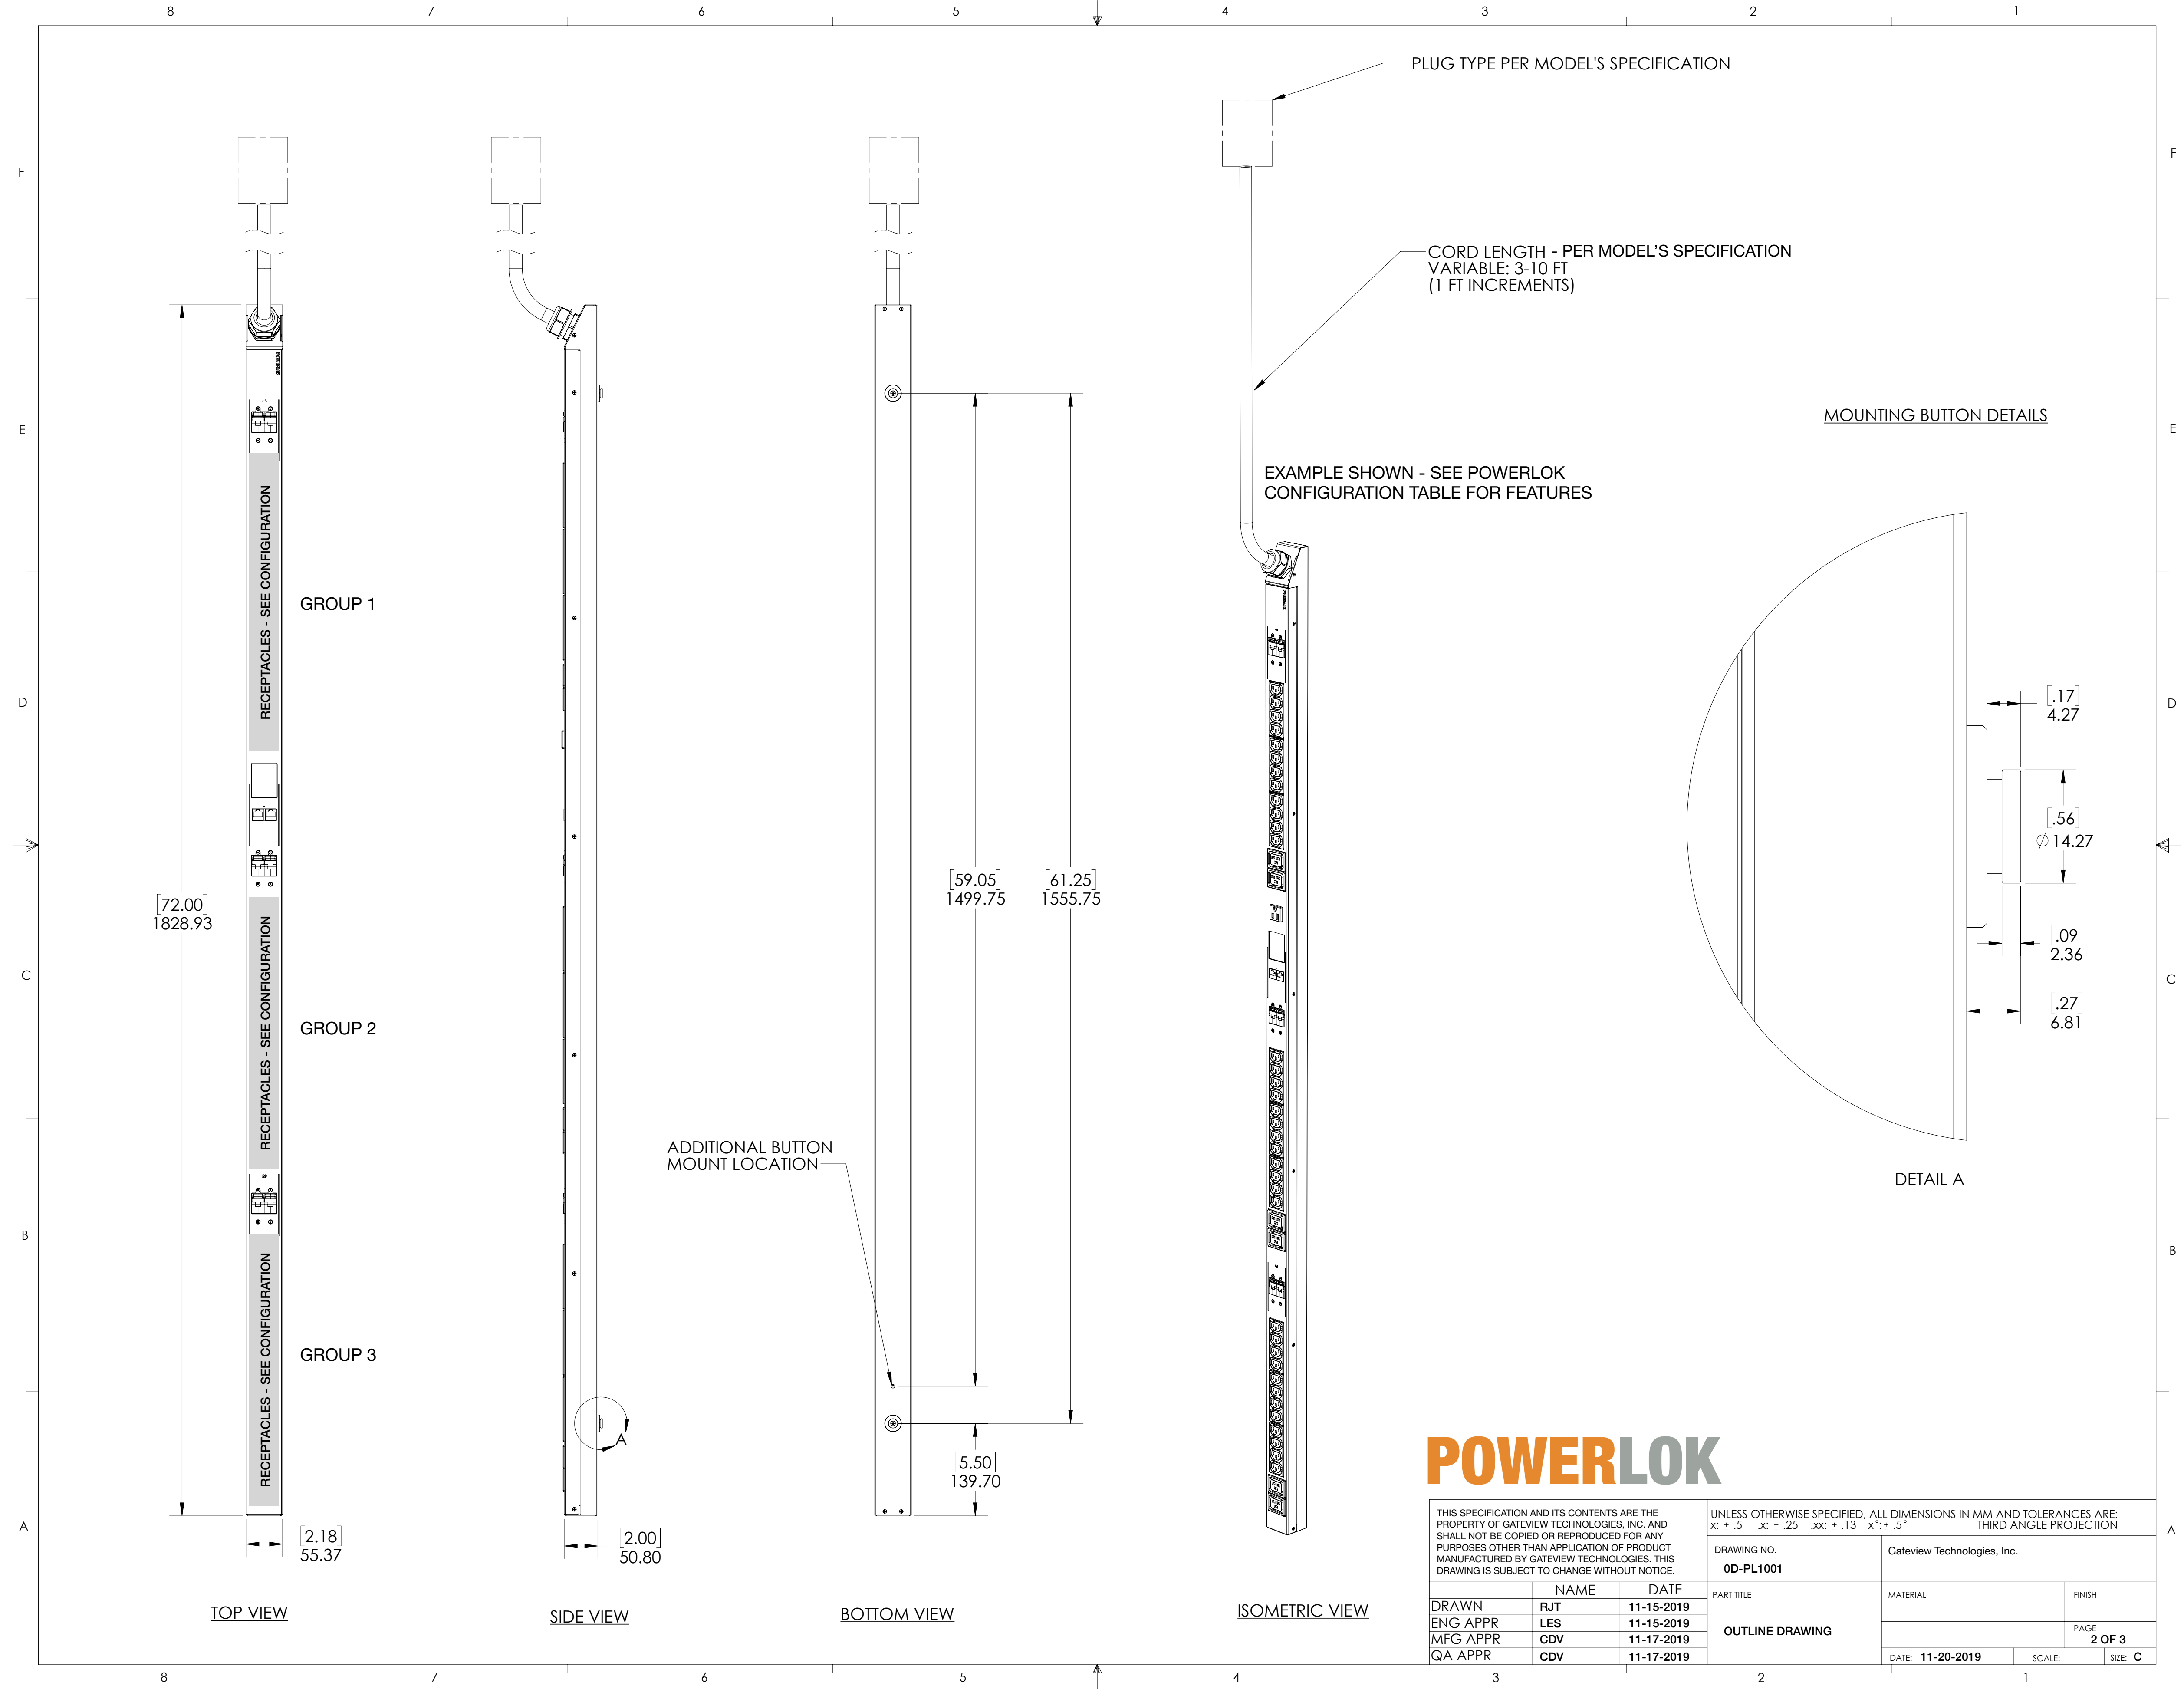

POWERLOK

THIS SPECIFICATION AND ITS CONTENTS ARE THE PROPERTY OF GATEVIEW TECHNOLOGIES, INC. AND SHALL NOT BE COPIED OR REPRODUCED FOR ANY PURPOSES OTHER THAN APPLICATION OF PRODUCT MANUFACTURED BY GATEVIEW TECHNOLOGIES. THIS DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE.			UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS IN MM AND TOLERANCES ARE: X: ± .5 .X: ± .25 .XX: ± .13 X": ± .5" THIRD ANGLE PROJECTION		
			DRAWING NO. 0D-PL1001	Gateview Technologies, Inc.	
DRAWN ENG APPR MFG APPR QA APPR	NAME RJT LES CDV CDV	DATE 11-15-2019 11-15-2019 11-17-2019 11-17-2019	PART TITLE OUTLINE DRAWING	MATERIAL	FINISH
				PAGE 2 OF 3	
			DATE: 11-20-2019	SCALE:	SIZE: C

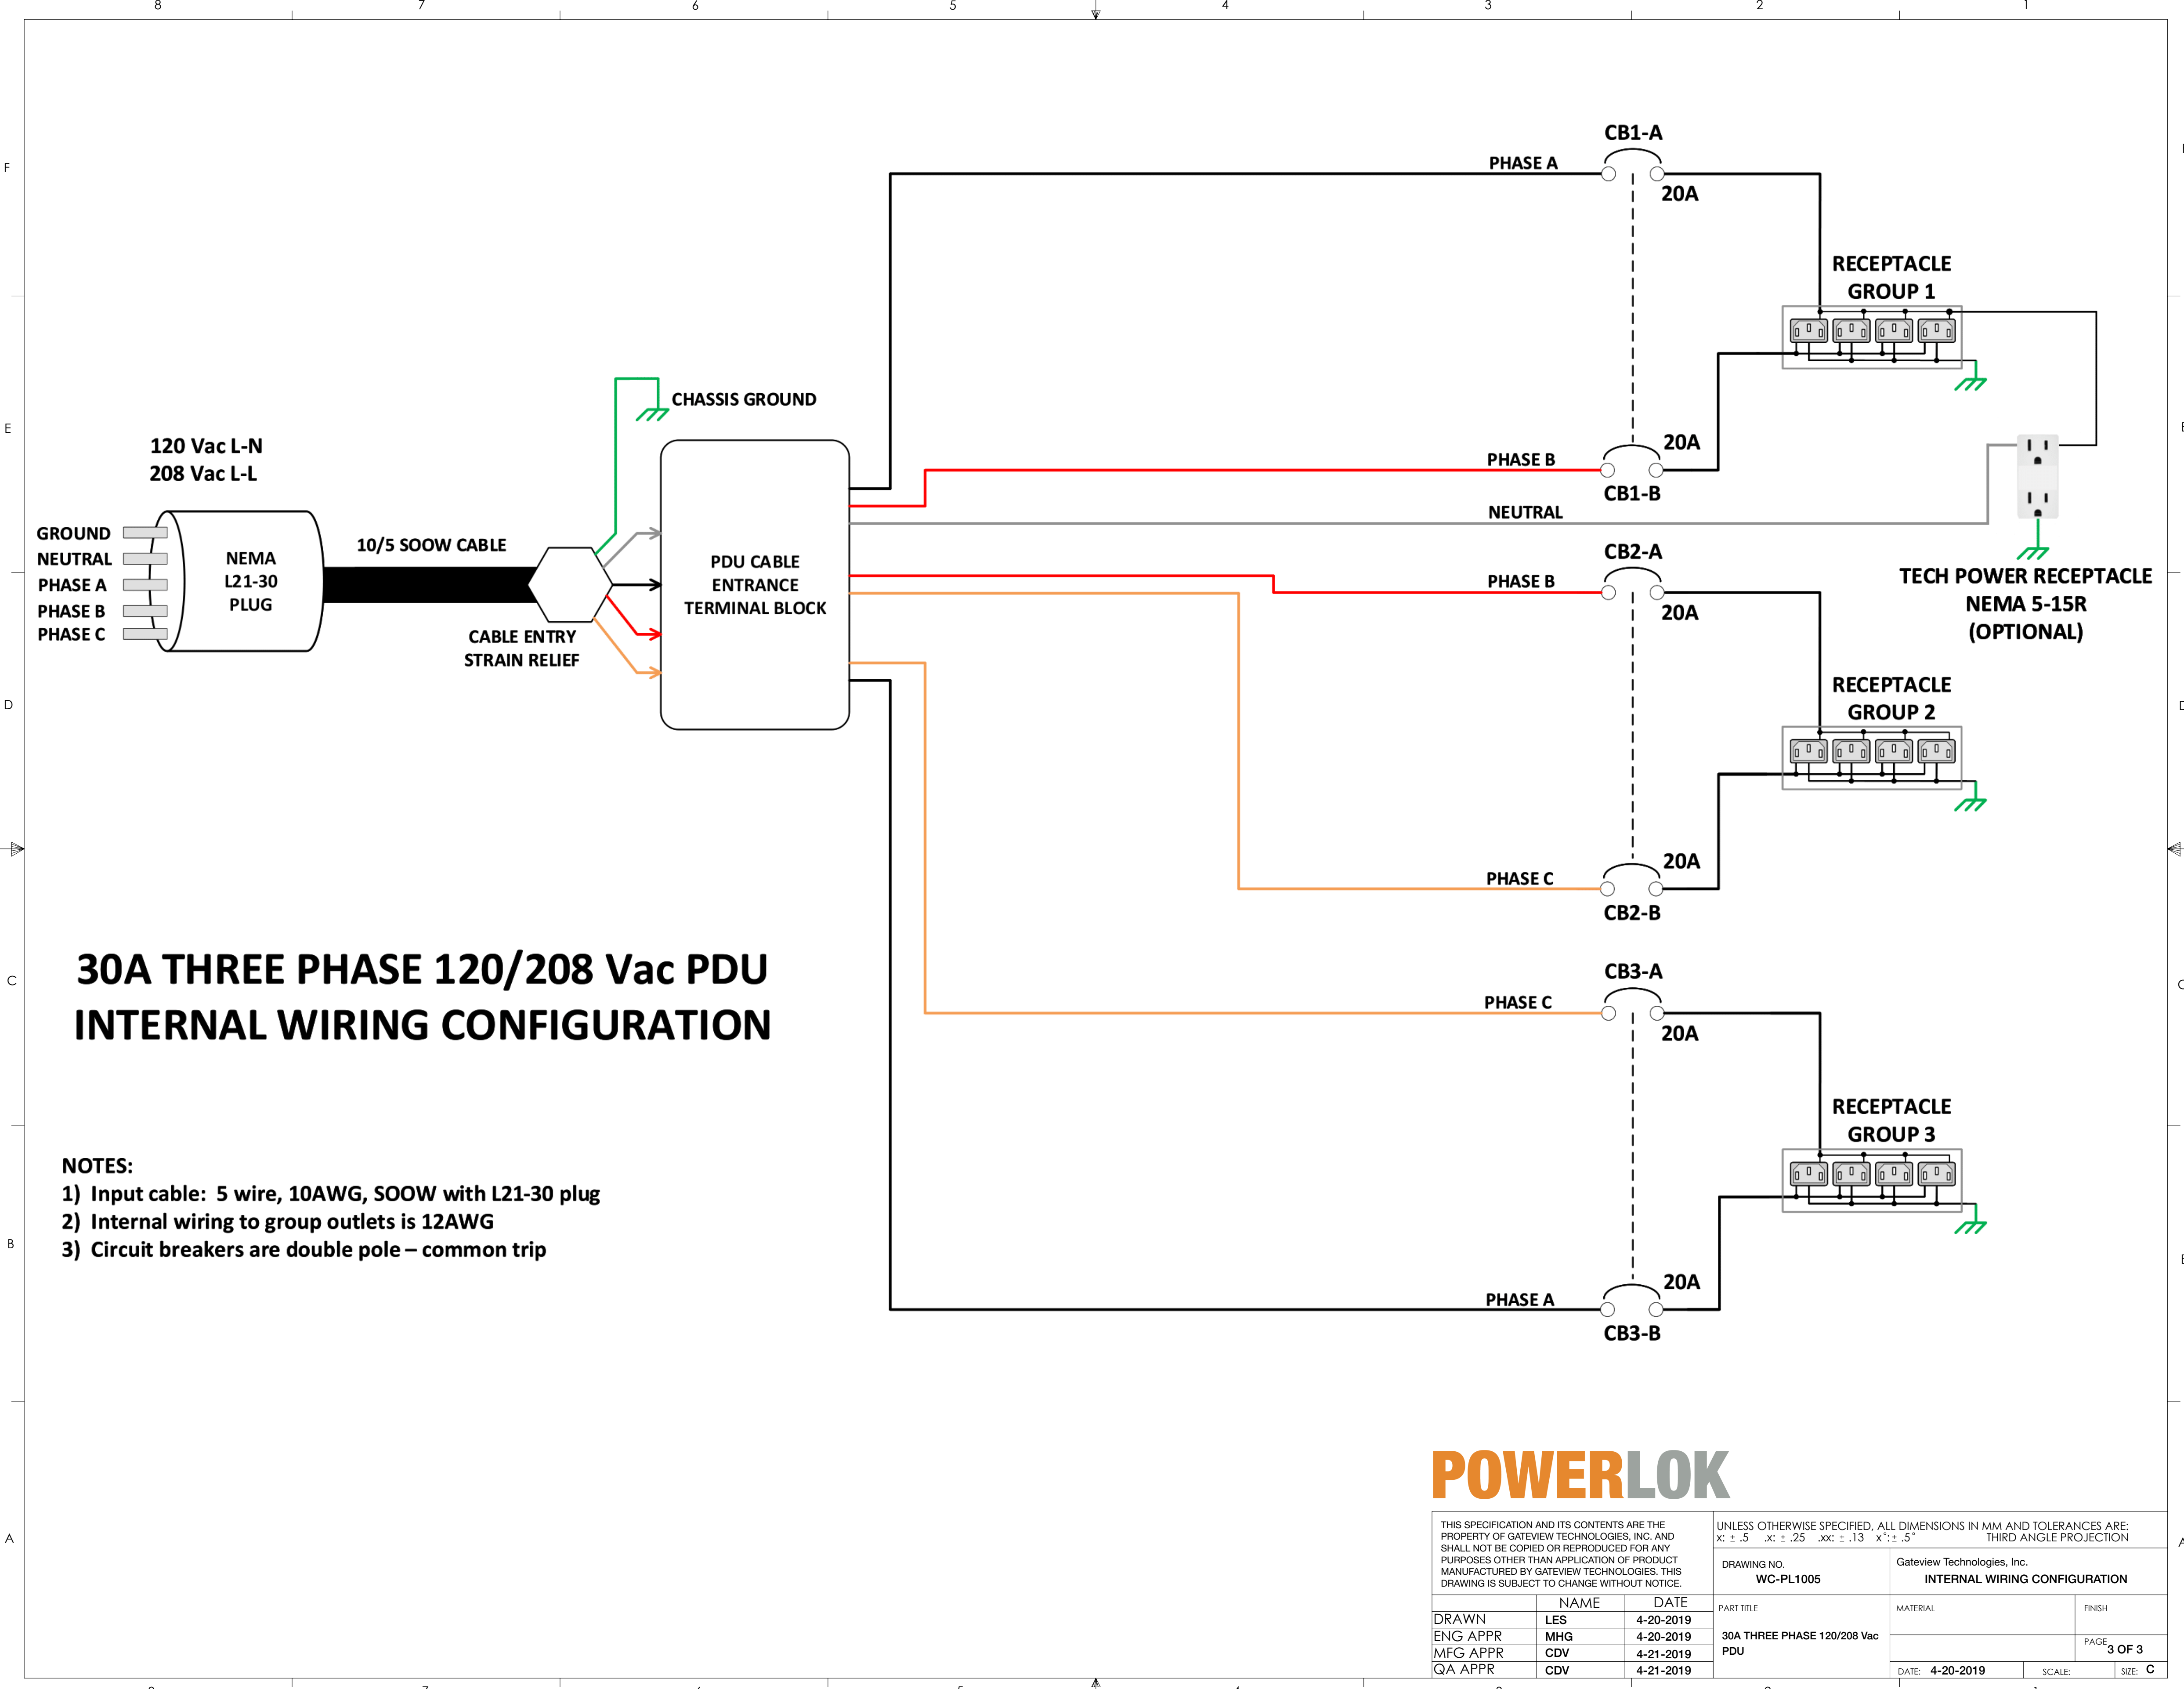

30A THREE PHASE 120/208 Vac PDU INTERNAL WIRING CONFIGURATION

- NOTES:**
- 1) Input cable: 5 wire, 10AWG, SOOW with L21-30 plug
 - 2) Internal wiring to group outlets is 12AWG
 - 3) Circuit breakers are double pole – common trip

POWERLOK

THIS SPECIFICATION AND ITS CONTENTS ARE THE PROPERTY OF GATEVIEW TECHNOLOGIES, INC. AND SHALL NOT BE COPIED OR REPRODUCED FOR ANY PURPOSES OTHER THAN APPLICATION OF PRODUCT MANUFACTURED BY GATEVIEW TECHNOLOGIES. THIS DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE.			UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS IN MM AND TOLERANCES ARE: X": ± .5 .X": ± .25 .XX": ± .13 X'": ± .5 THIRD ANGLE PROJECTION		
DRAWING NO. WC-PL1005			Gateview Technologies, Inc. INTERNAL WIRING CONFIGURATION		
DRAWN	LES	4-20-2019	PART TITLE	MATERIAL	FINISH
ENG APPR	MHG	4-20-2019	30A THREE PHASE 120/208 Vac PDU		PAGE 3 OF 3
MFG APPR	CDV	4-21-2019			
QA APPR	CDV	4-21-2019		DATE: 4-20-2019	SCALE: SIZE: C