




MONITORED Rack PDU Specification

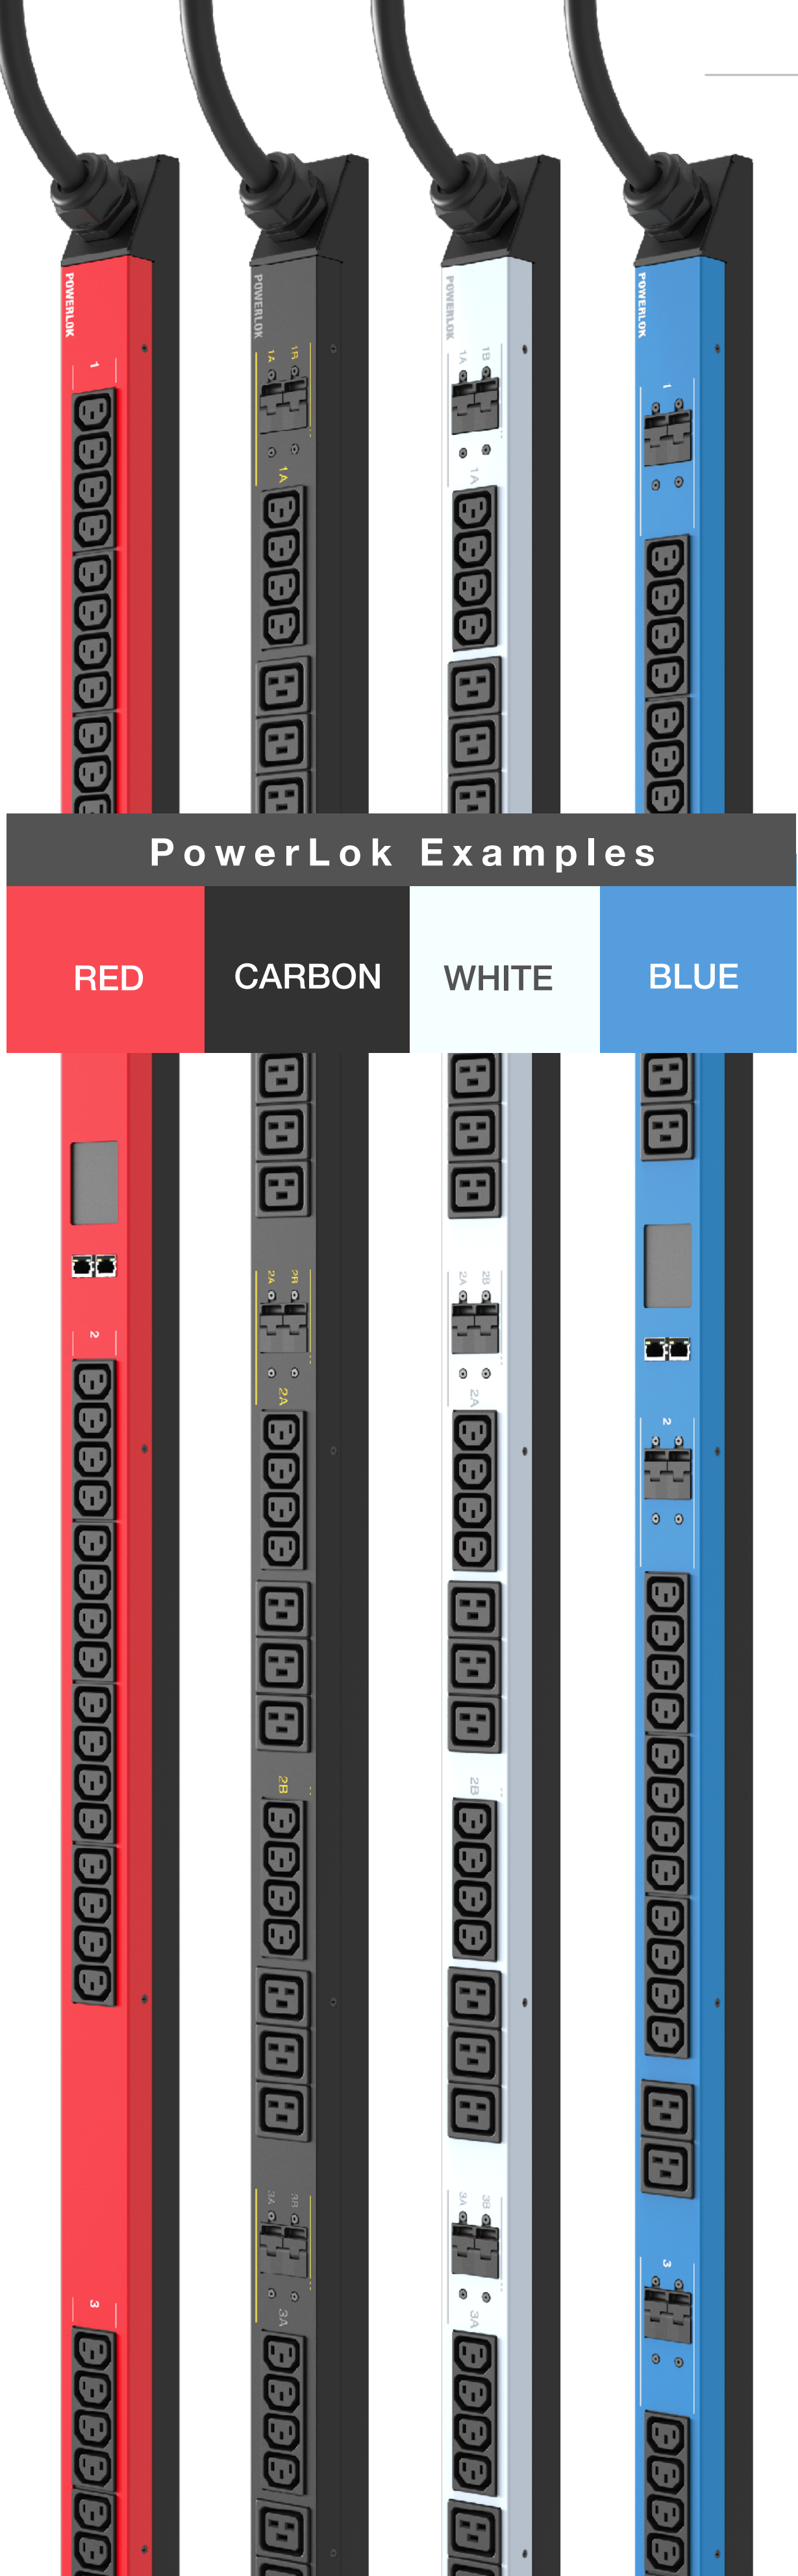


CUSTOMER SIGNATURE

DATE APPROVED

Customer agrees to this specific PowerLok configuration


PowerLok Configuration Model: PL7251 RACK PDU, BASIC, 72", 30A 240/415V 3PH (17.2 kW), 48-C13, 10FT WHIP, IEC 309 30A, CARBON	
POWER	30A 240/415V 3PH 17.2 kW
UNIT LENGTH	72 IN
PLUG TYPE	IEC 309 30A
WHIP LENGTH	10 FT
RECEPTACLES	48-C13
CORDLOK	NONE
MONITORING	NONE
120V TECH POWER	NONE
COLOR	CARBON

PowerLok Universal Specification Quote: Customer: Order No.: Order Qty:	
Over Current Protection	20A magnetic breakers on 30A models.
Power Whip	20A: 12AWG 3 or 5 wire & 30A: 10AWG 3 or 5 wire.
Operating Temperature	Full nameplate continuous operation: 0-50C (32-122F)
Heavy Steel - Powder Coat Color	See PowerLok Configuration Table for Color
Rack PDU Type	Vertical Rack-mount
Toolless Mounting: Center Spacing	61.25in (12.25 spacing standard). 59.05 mounting option available on Rack PDU.
Assembled in the USA	Yes - with local and off-shore sourced components
Product Warranty	3-year from date of shipment, repair or replace.
Certification/Agency Approvals	TUV Certified to UL/CSA 60950-1 with NOM Addendum for Mexico, FCC Part 15 Class A Conformance, RoHS Compliant
Operating Environment	0-50C (32-122F), 5-95% Relative Humidity, 0-10,000ft (0-3000 meters) Elevation.
Storage Environment	-25-65C (32-122F), 5-95% Relative Humidity, 0-10,000ft (0-3000 meters) Elevation.
Chassis Dimensions (LxWxD)	72"L x 2.18"W x 2.0"D
Package Dimensions (LxWxD)	84.0"L x 22.0"W x 5.0"D (4-Pack) 84.0"L x 11.0"W x 5.0"D (2-Pack) 84.0"L x 7.0"W x 5.0"D (1-Pack)
Rack PDU Weight	15.0 lbs. (Actual weight varies slightly based on configuration)
Packaged Weight	17.0 lbs (1 unit - actual weight varies slightly based on configuration)

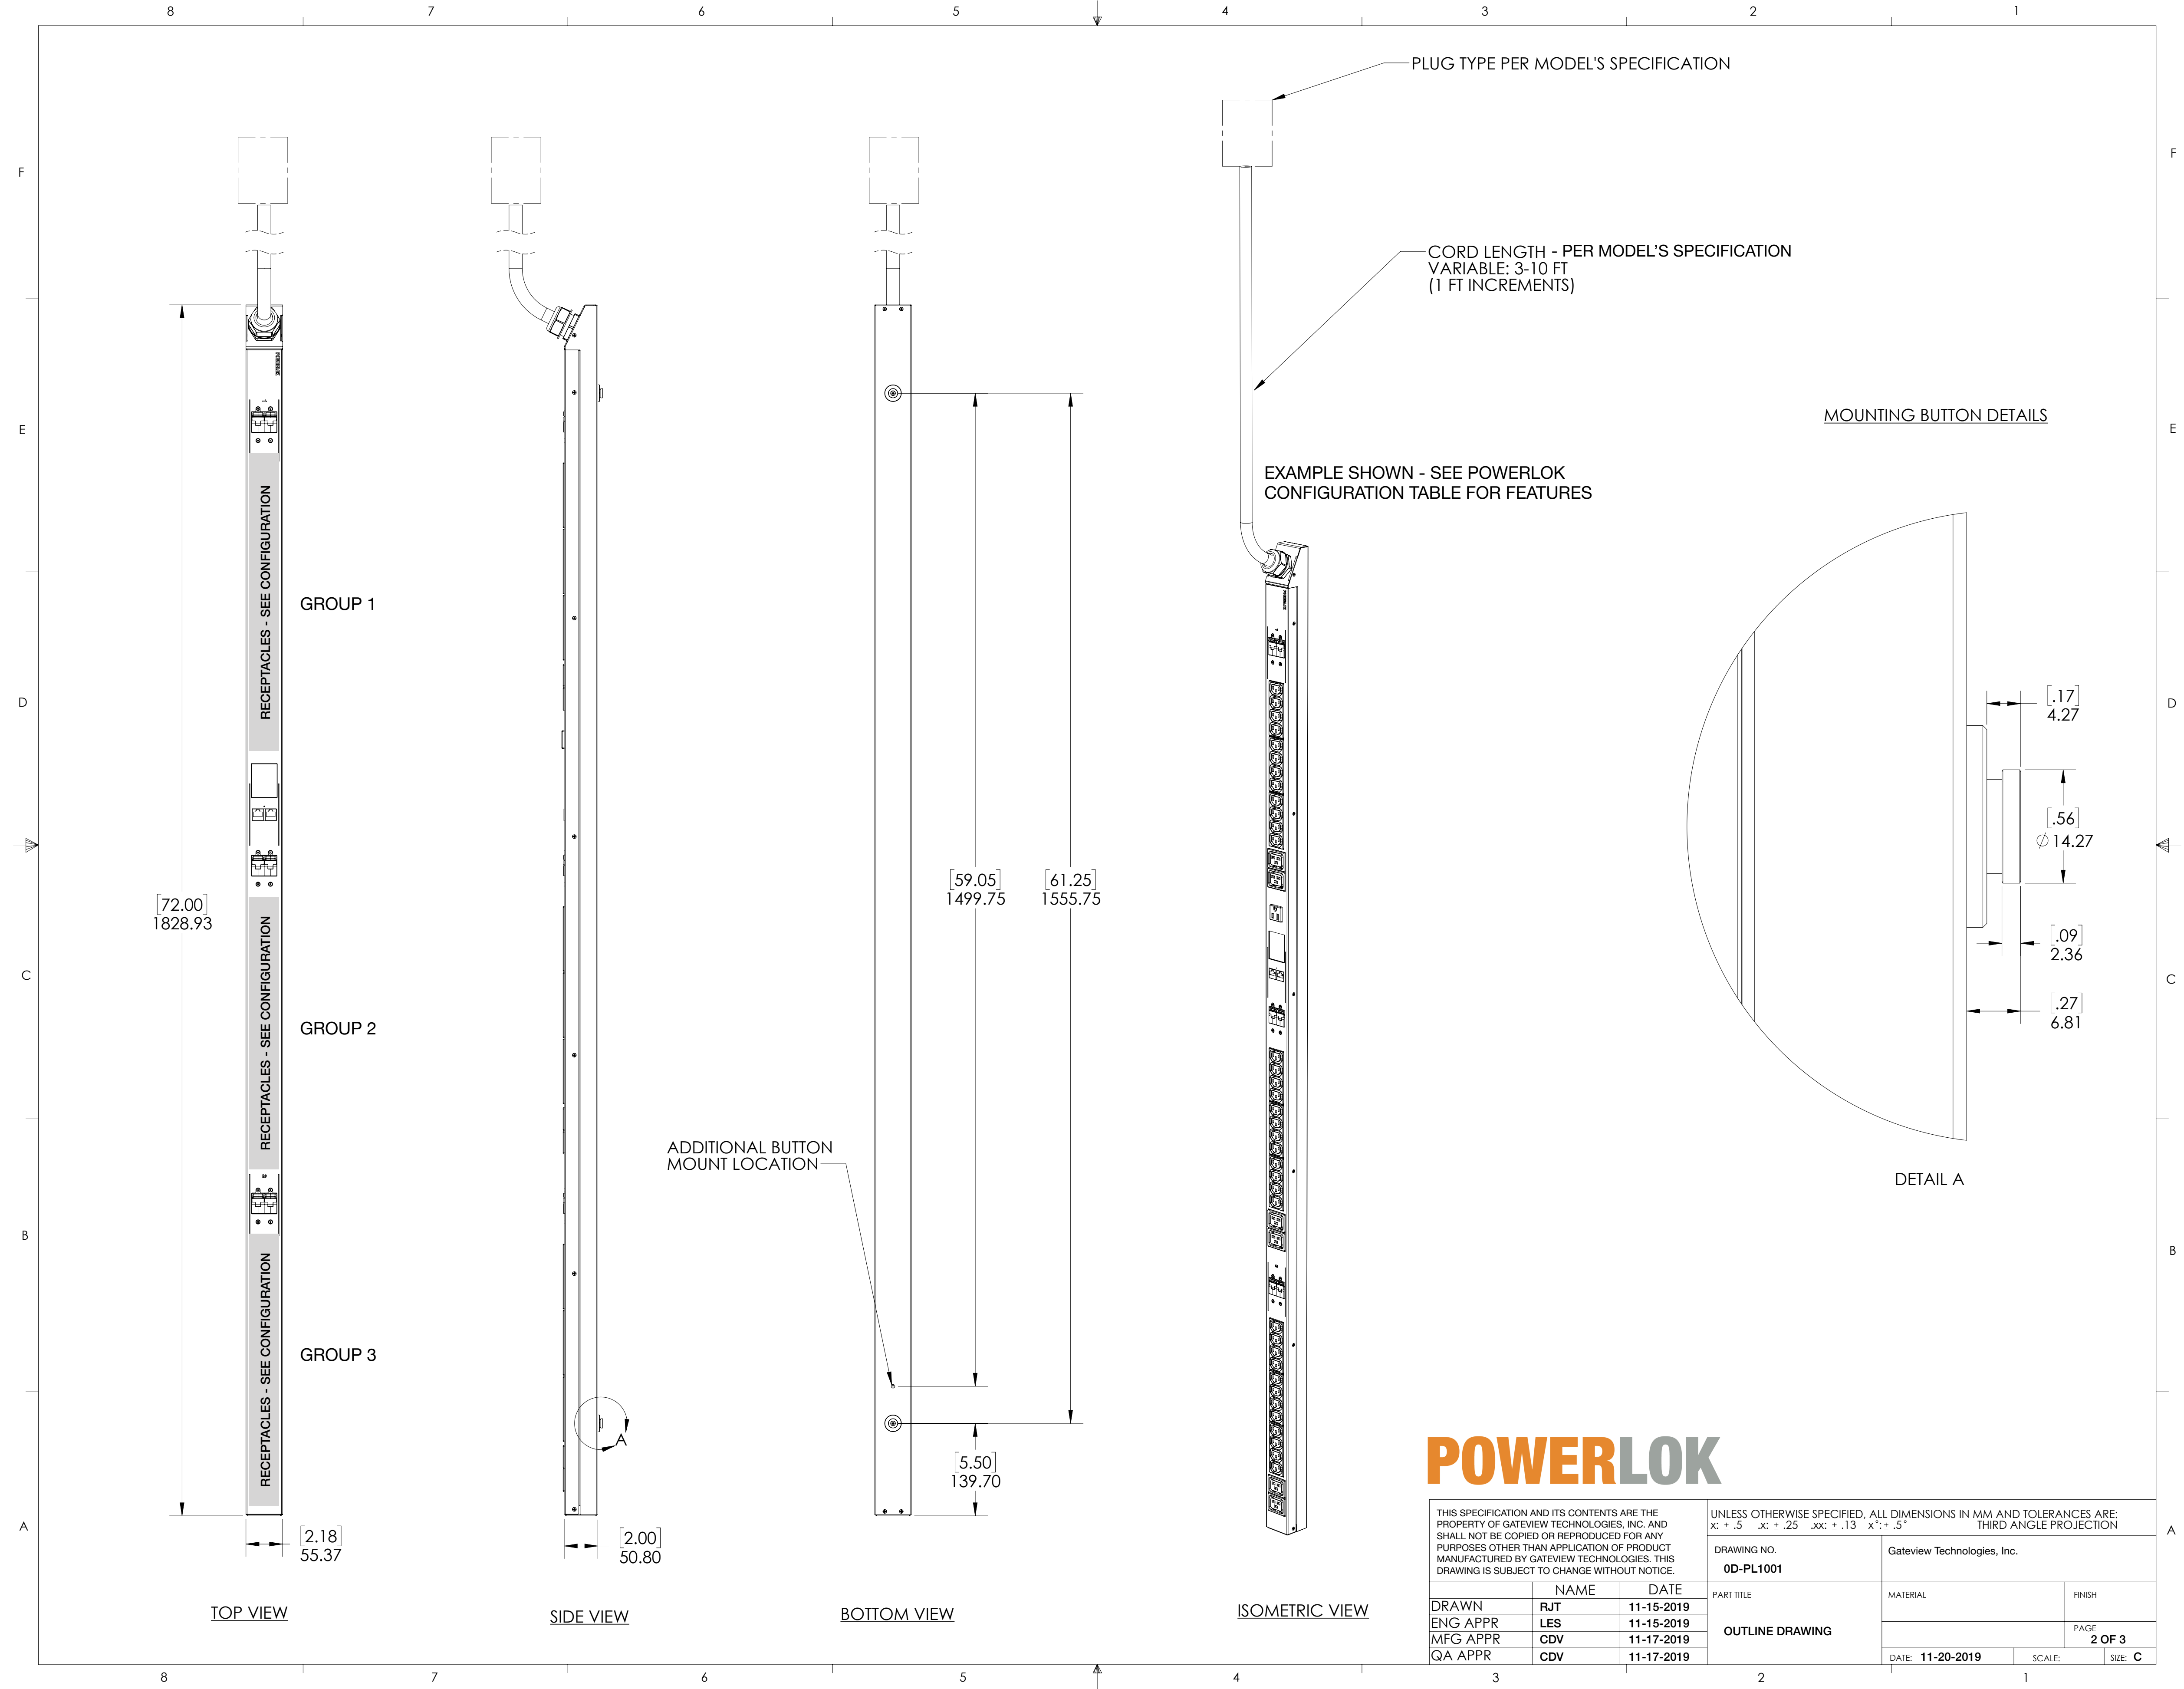

POWERLOK

THIS SPECIFICATION AND ITS CONTENTS ARE THE PROPERTY OF GATEVIEW TECHNOLOGIES, INC. AND SHALL NOT BE COPIED OR REPRODUCED FOR ANY PURPOSES OTHER THAN APPLICATION OF PRODUCT MANUFACTURED BY GATEVIEW TECHNOLOGIES. THIS DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE.			UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS IN MM AND TOLERANCES ARE: X: ± .5 .X: ± .25 .XX: ± .13 X": ± .5" THIRD ANGLE PROJECTION		
DRAWING NO.		Gateview Technologies, Inc.			
0D-PL1001					
PART TITLE		MATERIAL		FINISH	
OUTLINE DRAWING				PAGE	
				2 OF 3	
DATE: 11-20-2019		SCALE:		SIZE: C	
DRAWN		NAME		DATE	
ENG APPR		RJT		11-15-2019	
MFG APPR		LES		11-15-2019	
QA APPR		CDV		11-17-2019	

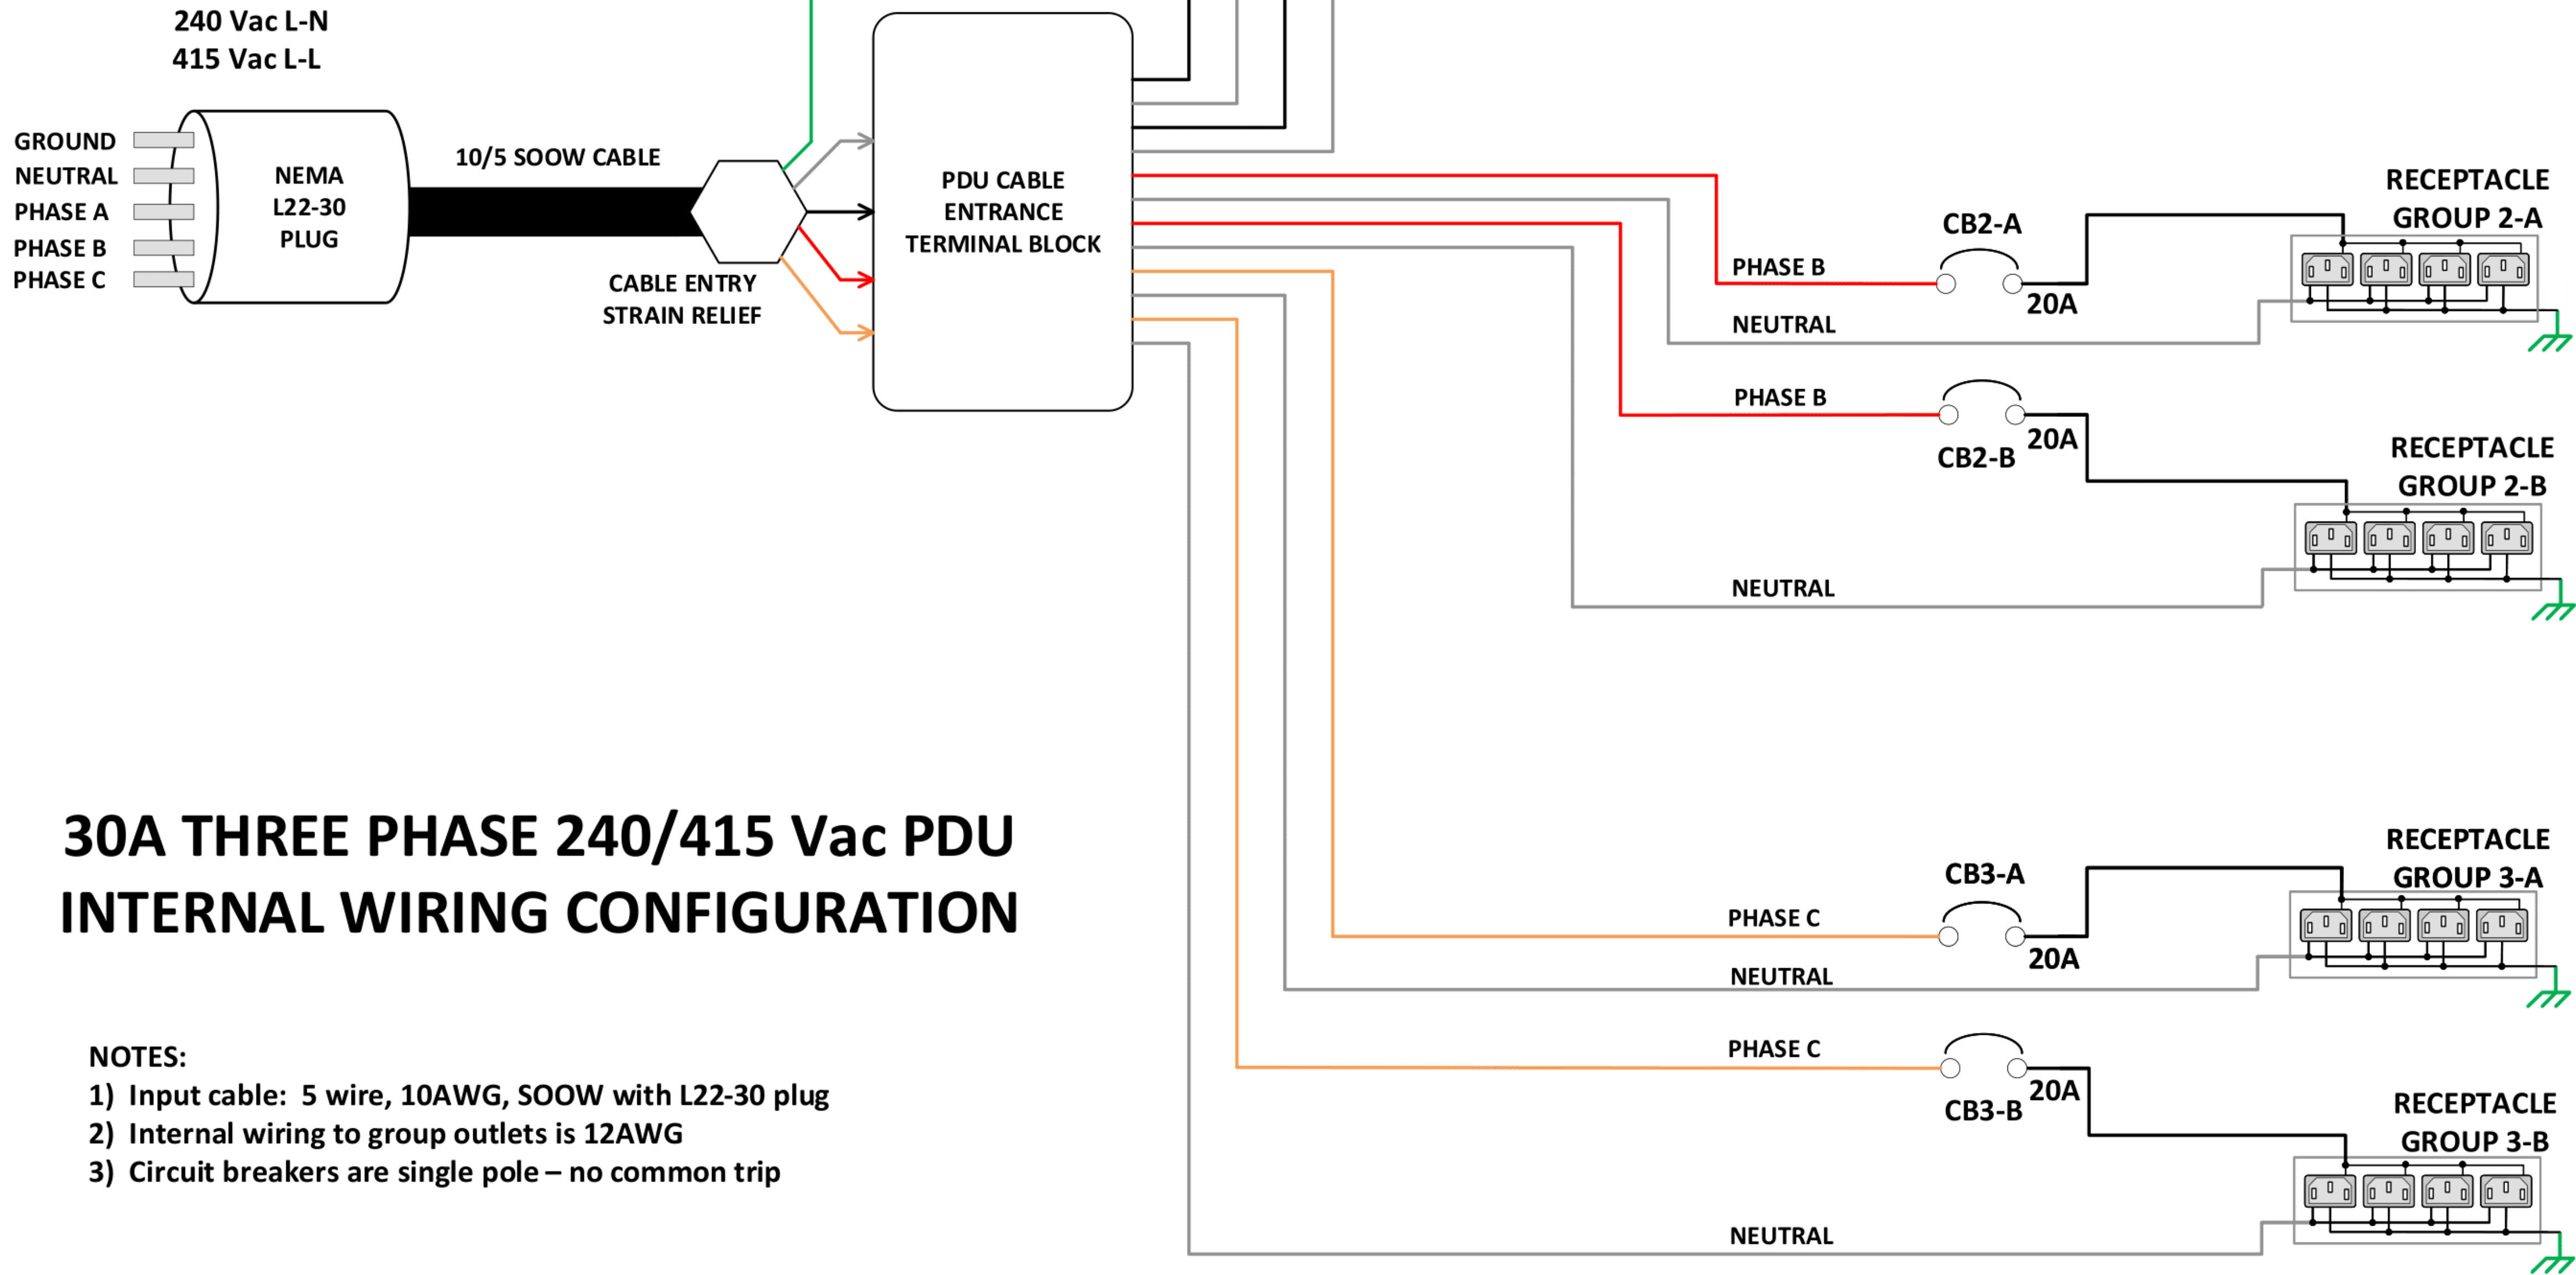

30A THREE PHASE 240/415 Vac PDU INTERNAL WIRING CONFIGURATION

- NOTES:
- 1) Input cable: 5 wire, 10AWG, SOOW with L22-30 plug
 - 2) Internal wiring to group outlets is 12AWG
 - 3) Circuit breakers are single pole – no common trip

POWERLOK

THIS SPECIFICATION AND ITS CONTENTS ARE THE PROPERTY OF GATEVIEW TECHNOLOGIES, INC. AND SHALL NOT BE COPIED OR REPRODUCED FOR ANY PURPOSES OTHER THAN APPLICATION OF PRODUCT MANUFACTURED BY GATEVIEW TECHNOLOGIES. THIS DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE.			UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS IN MM AND TOLERANCES ARE: X: ± .5 .X: ± .25 .XX: ± .13 X": ± .5" THIRD ANGLE PROJECTION		
DRAWING NO. WC-PL1007			Gateview Technologies, Inc. INTERNAL WIRING CONFIGURATION		
DRAWN	NAME LES	DATE 4-20-2019	PART TITLE	MATERIAL	FINISH
ENG APPR	MHG	4-20-2019	30A THREE PHASE 240/415 Vac PDU		PAGE 3 OF 3
MFG APPR	CDV	4-21-2019			
QA APPR	CDV	4-21-2019			
			DATE: 4-20-2019	SCALE:	SIZE: C