


POWERLOK SALES DEMO KIT

DEMO KIT INCLUDES	Item Number, Description
DEMO KIT MODEL	PL8KIT24-01, RACK PDU DEMO UNIT WITH SWITCHLOK AND ENVIROLOK UNITS IN DISPLAY PACKAGING
INCLUDES (1) OF EACH	
RACK PDU DEMO UNIT	PL8DEMO24-01, RACK PDU DEMO, SWITCHED READY, 24", 20A 120V 1PH, 6-C13 & 2-C19, 4FT WHIP, 5-15P, CARBON, CORDLOK
SWITCHLOK MODEL	SL1300SM, SWITCHLOK, OUTLET SWITCHING AND METERING, C13-C14, 5FT
ENVIROLOK MODEL	EL2001, ENVIROLOK TEMPERATURE + HUMIDITY PDU SENSOR (2) PODS A-B, (2) 6 FT RJ12 CORDS
PDU 24" DEMO CARTON	730-0006, CARTON, MULTI-PACK-2 RACK PDU
PDU DEMO PACKING FOAM	730-0101, PACKING, FOAM, MULTI-PACK-4 RACK PDU

INCLUDED ITEM SPECIFICATIONS

PL8DEMO24-01 Specification	
Model Number	PL8DEMO24-01
Description	Rack PDU Demo, Switched Ready, 24", 20A 120V 1PH, 6-C13 & 2-C19, 4FT Whip, 5-15P, Carbon, CordLok
Over Current Protection	20A UL489 magnetic breakers
Power Whip	12GA 3-WIRE SOOW
Heavy Steel - Powder Coat Color	Carbon
Rack PDU Type	Vertical Rack-mount
Toolless Mounting: Center Spacing	12.25"
Manufactured in the USA	Yes
Operating Environment	0-60C (32-149F), 5-95% relative humidity, 0-10,000ft (0-3000 meters) elevation.
Storage Environment	-25-65C (-13-149F), 5-95% relative humidity, 0-10,000ft (0-3000 meters) elevation.
Chassis Dimensions (LxWxD)	24"L x 2.18"W x 2.0"D
Rack PDU Weight	6.6 lbs.
Packaged Weight (each)	8.8 lbs.
Monitored & Switching Application	
MONITORING TYPE:	REMOTE & TOUCHSCREEN DISPLAY, ENVIROLOK READY. SWITCHED READY
Monitoring Accuracy	Voltage: +/- 0.5% at nominal. Current: within 0.5% from 1A to 30A typical. +/-1% of measurement from 500mA to 30A.
Total Unit & Group Monitoring	Aggregate (kWh, W, VA) plus Phase: A, B, C Line Currents, plus Group: 1, 2, 3 Monitoring (kWh, W, VA, PF, V, A)
Network Interface	Ethernet RJ-45, 10 Mbit/s, 100 Mbit/s
Transport/Internet	TCP/IP v4, v6
Network Applications	HTTP/HTTPS Webserver SNMP-V1/V2c/V3 Network Management DHCP for dynamic IP address request from a server on the network. Remote firmware upgrade using FTP.
Touch & Rotatable Digital Display	Touch to rotate / touch to view data screens
Internal RMS Voltage Sensor	Yes
Internal RMS Current Sensor	Yes
Environmental Monitoring	Optional EnviroLok daisy chain temp/humidity (optional - up to 4 sensors). Monitoring accuracy +/- 0.2C and +/- 2% Rh.

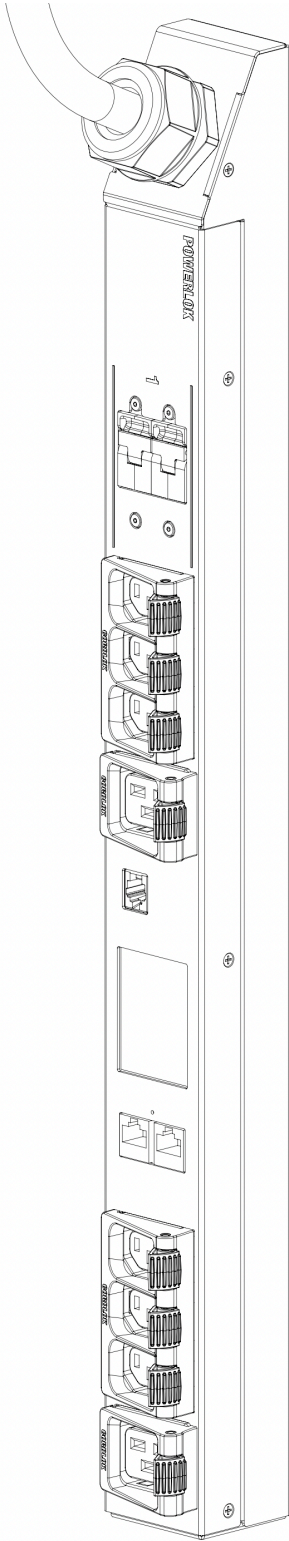

MADE AND ROBOTICALLY SOLDERED IN THE USA


POWERLOK

*CUSTOMER SIGNATURE:	DATE:	UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN MM AND TOLERANCES ARE:  X = +/- 0.5 .X = +/- 0.25 .XX = +/- 0.13 X' = +/- 0.5"	Gateview Technologies, Inc.	
*PRIOR TO MANUFACTURING, BUILD MODELS REQUIRE CUSTOMER SIGN-OFF. BY SIGNING, CUSTOMER AGREES THAT THIS ORDER IS NON-CANCELABLE AND NON-RETURNABLE.			TITLE: <b>8000 SERIES DEMO KIT SPECIFICATION</b>	
			DRAWING NUMBER: <b>SP-PL8KIT24-01</b>	SHEET: <b>1 OF 2</b>
THIS SPECIFICATION AND ITS CONTENTS ARE THE PROPERTY OF GATEVIEW TECHNOLOGIES, INC. AND SHALL NOT BE COPIED OR REPRODUCED FOR ANY PURPOSES OTHER THAN APPLICATION OF PRODUCT MANUFACTURED BY GATEVIEW TECHNOLOGIES. THIS DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE.				



SLI300SM Specification

Model Number	SL1300SM
Description	SwitchLok, Outlet Switching and Metering, C13-C14, 5FT
Power	11A (C13-C14) & 15A (C19-C20), Continuous at 50C, 250V maximum
Cord Length	5 FT
Plug Types	IEC C13-C14 & IEC C19-C20
Unit Size	1.45”W x 1.25”D x 4.25”L
Color	Carbon
Material	High impact ABS
Connectivity	Bonded TTL-UART Wi-Fi 802.11 @ 2.4 GHz
BUS	GVBUS 4.10, Gateview Technologies proprietary bus protocol
Weight	0.74 lbs
Operating Environment	0-65C (32-149F), 5-95% Relative Humidity, 0-10,000ft (0-3000 meters) Elevation.
Product Warranty	3-years from date of shipment
Certifications	UL certified, NOM, FCC Part 15 Class A Conformance, RoHS Compliant

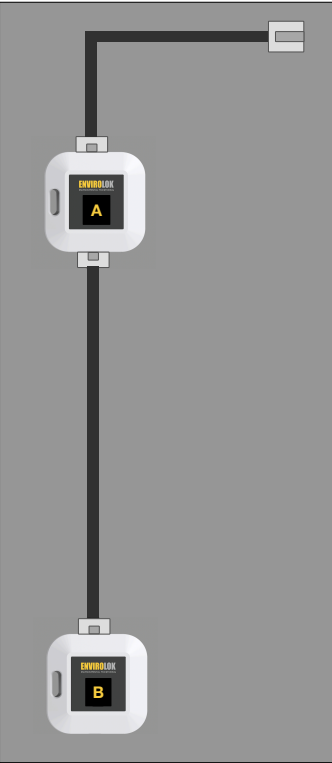

EL2001 Specification

Model Number	EL2001
Description	EnviroLok Temperature + Humidity PDU Sensor (2) Pods A-B, (2) 6 FT RJ12 Cords
Power	SELV Over Supplied RJ12 Cable
Cord Length (Each)	6FT RJ12 Cord
Plug Types	RJ11
Unit Size	1.40”W x 1.40”D x 0.81”L
Color	White
Material	High impact ABS
Connectivity	GVBUS 2.20, Gateview Technologies proprietary bus protocol
Weight	0.30 lbs
Monitoring Accuracy	0.2C temperature, 2% relative humidity
Product Warranty	3-years from date of shipment

PDU 24” Demo Packaging

Carton Part Number & Description	730-0006, Carton, Multi-Pack-2 Rack PDU
Package Dimensions (LxWxD)	32.0”L x 11.0”W x 4.8”D
Foam Part Number & Description	730-0101, Packing, Foam, Multi-Pack-4 Rack PDU

MADE AND ROBOTICALLY SOLDERED IN THE USA

POWERLOK

*CUSTOMER SIGNATURE:	DATE:	UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN MM AND TOLERANCES ARE:  X = +/- 0.5 .X = +/- 0.25 .XX = +/- 0.13 X' = +/- 0.5"	Gateview Technologies, Inc.	
*PRIOR TO MANUFACTURING, BUILD MODELS REQUIRE CUSTOMER SIGN-OFF. BY SIGNING, CUSTOMER AGREES THAT THIS ORDER IS NON-CANCELABLE AND NON-RETURNABLE.			TITLE: 8000 SERIES DEMO KIT SPECIFICATION	
			DRAWING NUMBER: SP-PL8KIT24-01	SHEET: 2 OF 2
THIS SPECIFICATION AND ITS CONTENTS ARE THE PROPERTY OF GATEVIEW TECHNOLOGIES, INC. AND SHALL NOT BE COPIED OR REPRODUCED FOR ANY PURPOSES OTHER THAN APPLICATION OF PRODUCT MANUFACTURED BY GATEVIEW TECHNOLOGIES. THIS DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE.				