Specific Configurations								
COLOR	CARBON		RED		WHITE		BLUE	
WHIP LENGTH	6 FT	10 FT	6 FT	10 FT	6 FT	10 FT	6 FT	10 FT
SWITCHED READY MODEL	PL8233S-06C	PL8233S-10C	PL8233S-06R	PL8233S-10R	PL8233S-06W	PL8233S-10W	PL8233S-06B	PL8233S-10B
MONITORED MODEL	PL8233M-06C	PL8233M-10C	PL8233M-06R	PL8233M-10R	PL8233M-06W	PL8233M-10W	PL8233M-06B	PL8233M-10B
BASIC MODEL	PL8233B-06C	PL8233B-10C	PL8233B-06R	PL8233B-10R	PL8233B-06W	PL8233B-10W	PL8233B-06B	PL8233B-10B
DESCRIPTION	RACK PDU, 72", 20A 208/240V 1PH, 32-C13 & 4-C19, L6-20P, CORDLOK							
POWER	20A 208/240V 1PH (3.3 kW)							
PLUG TYPE	L6-20P	L6-20P						
UNIT LENGTH	72 INCHES							
RECEPTACLES	32-C13 & 4-C19							
CORDLOK	YES							


Universal Specification		
Over Current Protection	None	
Power Whip	See PDU Ratings Table - page 2	
Heavy Steel - Powder Coat Color	Per PowerLok specific configuration for color	
Rack PDU Type	Vertical Rack-mount	
Toolless Mounting: Center Spacing	61.25"	
Manufactured in the USA	Yes	
Product Warranty	7-year from date of shipment, repair or replace.	
Certification/Agency Approvals	TUV Certified to UL/CSA 60950-1 with NOM Addendum for Mexico, FCC Part 15 Class A conformance, RoHS compliant	
Operating Environment	0-60C (32-149F), 5-95% relative humidity, 0-10,000ft (0-3000 meters) elevation.	
Storage Environment	-25-65C (-13-149F), 5-95% relative humidity, 0-10,000ft (0-3000 meters) elevation.	
Chassis Dimensions (LxWxD)	72.0"L x 2.18"W x 2.0"D	
Package Dimensions (LxWxD)	80.0"L x 22.0"W x 4.8"D (3&4-Pack), 80.0"L x 11.0"W x 4.8"D (1&2-Pack)	
Pallet Dimensions (LxWxD)	82"L x 44"W x 5.0"D	
Rack PDU Weight	15.1 lbs.	
Packaged Weight (each)	16.9 lbs.	
Monitored & Switched Versi	ons Only	
MONITORING TYPE:	REMOTE & TOUCHSCREEN DISPLAY, ENVIROLOK READY. SWITCHED READY	
Monitoring Accuracy	Voltage: +/- 0.5% at nominal. Current: within 0.5% from 1A to 30A typical. +/1% of measurement from 500mA to 30A.	
Total Unit & Group Monitoring	Aggregate (kWh, W, VA) plus Phase: A, B, C Line Currents, plus Group: 1, 2, 3 Monitoring (kWh, W, VA, PF, V, A)	
Network Interface	Ethernet RJ-45, 10 Mbit/s, 100 Mbit/s	
Transport/Internet	TCP/IP v4, v6	
Network Applications	HTTP/HTTPS Webserver SNMP-V1/V2c/V3 Network Management DHCP for dynamic IP address request from a server on the network. Remote firmware upgrade using FTP.	
Touch & Rotatable Digital Display	Touch to rotate / touch to view data screens	
Internal RMS Voltage Sensor	Yes	
Internal RMS Current Sensor	Yes	
Environmental Monitoring	Optional EnviroLok daisy chain temp/humidity (optional - up to 4 sensors). Monitoring accuracy +/- 0.2C and +/- 2% Rh.	

### MADE AND ROBOTICALLY SOLDERED IN THE USA


# **POWERLOK**

MADE AND HOBO HOALET GOLDENED IN THE USA					
*CUSTOMER SIGNATURE:	DATE:	UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN	Gateview Technologies, Inc.		
*PRIOR TO MANUFACTURING, BUILD MODELS REQUIRE CUSTOMER SIGN-OFF. BY SIGNING. CUSTOMER AGREES THAT		MM AND TOLERANCES ARE: X = +/- 0.5	TITLE: RACK PDU SPECIFICATION		
THIS ORDER IS NON-CANC	-	.X = +/- 0.25 .XX = +/- 0.13 X° = +/- 0.5°	DRAWING NUMBER: SP-PL8233	SHEET: 1 OF 2	

THIS SPECIFICATION AND ITS CONTENTS ARE THE PROPERTY OF GATEVIEW TECHNOLOGIES, INC. AND SHALL NOT BE COPIED OR REPRODUCED FOR ANY PURPOSES OTHER THAN APPLICATION OF PRODUCT MANUFACTURED BY GATEVIEW TECHNOLOGIES. THIS DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE.

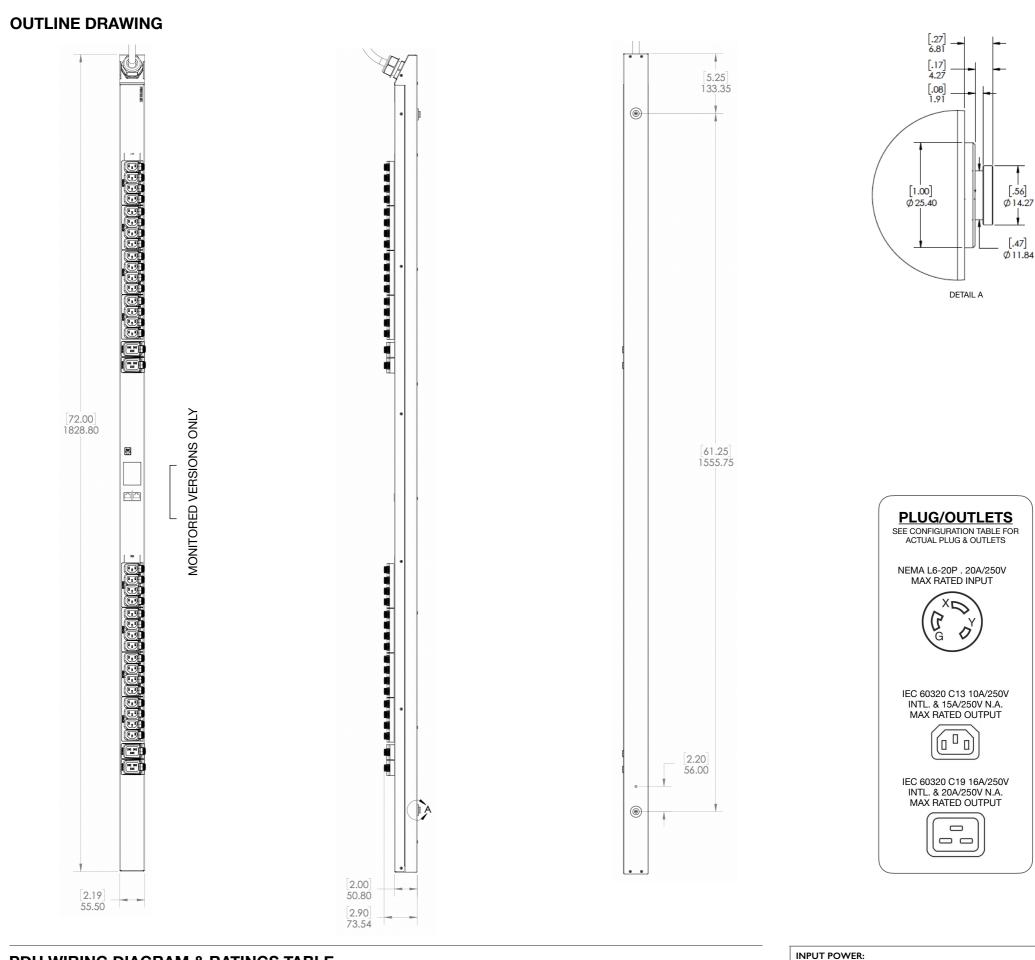

### **PDU WIRING DIAGRAM & RATINGS TABLE**

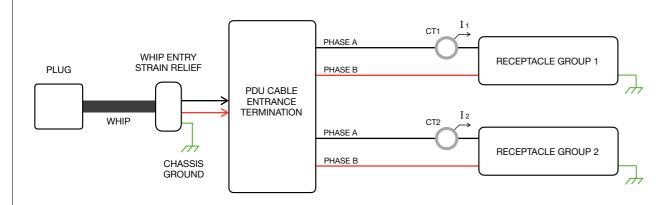

# WHIP TYPE I 2GA 3-WIRE SOOW VOLTAGE 208/240V IPH FREQUENCY 50/60 HZ RATED AMPS 20A MAX CONT.AMPS 16A OUTPUT POWER: GROUP I PH.A-B, 16A MAX CONT. GROUP 2 PH.A-B, 16A MAX CONT.

### +5V +5V +5V RESISTIVE ANALOG BOARD +5V RTN +5V RTN +5V RTN FOR MONITORED LOGIC POWER & UTILITY VOLTAGE SENSING DIGITAL BOARD VOLTAGE & TOUCH VERSIONS ONLY. BUSS **SCREEN** VA CURRENT POWER & KVA INTERNAL TEMP. ETHERNET LOCAL MEMORY BASIC MODELS DO Vв SELV OUTPUTS NOT HAVE CT'S. ETHERNET PORTS DIGITAL CONV.

### MADE AND ROBOTICALLY SOLDERED IN THE USA

## **POWERLOK**

*CUSTOMER SIGNATURE:	DATE:	UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN	Gateview Technologies, Inc.		
*PRIOR TO MANUFACTURING, BUILD MODELS REQUIRE CUSTOMER SIGN-OFF. BY SIGNING, CUSTOMER AGREES THAT THIS ORDER IS NON-CANCELABLE AND NON-RETURNABLE.		MM AND TOLERANCES ARE: X = +/- 0.5 .X = +/- 0.25 .XX = +/- 0.13 X° = +/- 0.5°	TITLE: RACK PDU SPECIFICATION		
			DRAWING NUMBER: SP-PL8233	SHEET: 2 OF 2	

THIS SPECIFICATION AND ITS CONTENTS ARE THE PROPERTY OF GATEVIEW TECHNOLOGIES, INC. AND SHALL NOT BE COPIED OR REPRODUCED FOR ANY PURPOSES OTHER THAN APPLICATION OF PRODUCT MANUFACTURED BY GATEVIEW TECHNOLOGIES. THIS DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE.